


1080-2L **LEPLEX 2**

## 1081-2L

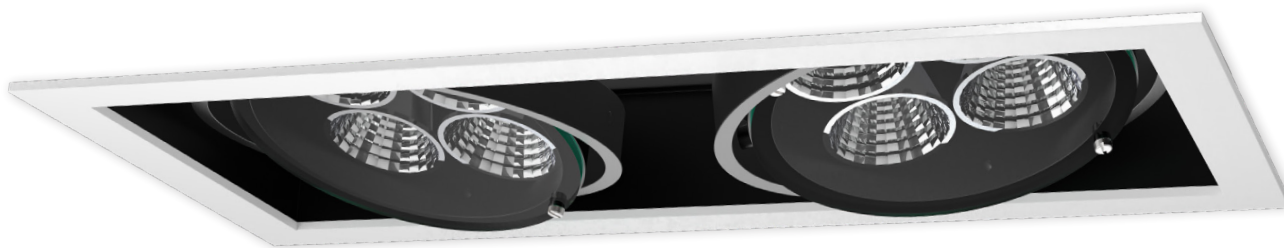

## SPECIFICATIONS:

3.5 kg	82+ 3K and 4K	70+ 5K	362x185	Tilt 20x20°	SELV	IP20	CE	Available	5 Year warranty	Made in Australia
--------	------------------	-----------	---------	-------------	------	------	----	-----------	--------------------	-------------------

## CONSTRUCTION &amp; DESIGN

- Recessed LED adjustable downlight
- Housing and trim is constructed in steel and finished in durable polyester powdercoat paint
- Tilt housing constructed in die cast aluminium alloy and finished in durable polyester powdercoat paint
- Two way tilt adjustable gives aiming flexibility for both ambient and feature lighting with low glare illumination

## OPTICAL &amp; THERMAL PERFORMANCE

- Heatsink manufactured from custom developed aluminium alloy for better and faster heat dissipation
- Efficient optical control with no harsh cut off and ultra low glare

## ELECTRICAL SYSTEM

- Supplied standard with two remote non-dimmable drivers (refer to dimming options table)
- All drivers come with quick-connect harness, power cord and plug
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60Hz




## TECHNICAL PERFORMANCE

- 2x28 or 2x45W total system power consumption with overload and short circuit protection
- > 65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (MacAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with low colour shift over time

## CODE ORDERING GUIDE:

PRODUCT CODE / DIM CODE - COLOUR CODE

Example: 1080-2L-SP-3K-28W-01 or 1080-2L-SP-3K-28W/DALI-01

SYSTEM POWER	COLOUR TEMP.	 24° SP	 36° FL	 47° WFL	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT		
		PRODUCT CODE				SP	FL	WFL
2x28W	3K	1080-2L-SP-3K-28W	1080-2L-FL-3K-28W	1080-2L-WFL-3K-28W	6624	5126	5114	5068
	4K	1080-2L-SP-4K-28W	1080-2L-FL-4K-28W	1080-2L-WFL-4K-28W	6960	5382	5366	5322
	5K	1080-2L-SP-5K-28W	1080-2L-FL-5K-28W	1080-2L-WFL-5K-28W	7104	5284	5272	5226
2x45W	3K	1081-2L-SP-3K-45W	1081-2L-FL-3K-45W	1081-2L-WFL-3K-45W	9620	7458	7374	7348
	4K	1081-2L-SP-4K-45W	1081-2L-FL-4K-45W	1081-2L-WFL-4K-45W	10210	7904	7914	7788
	5K	1081-2L-SP-5K-45W	1081-2L-FL-5K-45W	1081-2L-WFL-5K-45W	10450	7688	7602	7574

DIM CODE		2x28W	2x45W
/DALI	Dali Dimming / Switch Dim	✓	✓
/DSI	Digital Dimming	✓	✓
/AD	Analogue Dimming 1-10V	✓	✓
/DIM	Leading & Trailing edge	✓	✓
	Non-dimmable	Std	Std

COLOUR CODE	Trim colour (internal is always black)
-01	Satin White
-06	Matte Black
-10	Bright Silver

