

# GAP55046-S1



## SPECIFICATIONS:



### CONSTRUCTION & DESIGN

- Surface mount or suspended natural anodised aluminium extrusion
- High quality opal matte UV resistant diffuser
- Supplied as standard length (contact sales). Also optional customised length (cutting increments of 50mm)
- For indoor use only



### ELECTRICAL SYSTEM

- Input Voltage 12V or 24V DC
- Connects to remote 12V or 24V DC power supply, to be ordered separately
- Supplied with 2 Core input cable
- Parallel connection

### TECHNICAL PERFORMANCE


- 4.8W, 7.2W, 9.6W, 14.4W or 19.2W LED power consumption per metre
- >65,000 hours lifespan (L70)
- Chromaticity tolerance (MacAdam step)-2
- Available in 3.2K or 4.2K color temperature. Other colour temperatures or CRI available on request
- Maximum run of 5 metres per driver

## DIMENSION

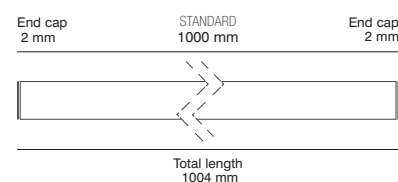


### STANDARD ACCESSORIES

End caps

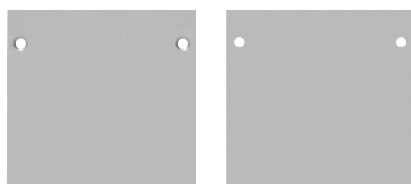

### OPTIONAL ACCESSORIES

Adjustable Mounting Bracket



### COLOUR CODE

-03		Textured White
-07		Textured Black