



ECOSTAR S9048TC - 12W

Dimmable 12 watt LED downlight with selectable CCT, IP54

Application

Ideal for any residential or commercial interior space

Design Specifications

- Selectable CCT 3000K / 4000K / 5000K
- Durable die-cast aluminium body profile
- Stylish powder coat or plated finish
- High output LED optics
- Multi-faceted reflector, 55° beam
- Remote, trailing edge dimmable LED driver, with flex and plug, white surface mount options available, 145hm, x Ø152mm (S9048SM/TC/WH), IC - 4 rated, double insulated



Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge, optional 1-10V, DALI / DSI**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9048TC/WH	240	12	1000/1200/1100	3000/4000/5000	55
	S9048SM/TC/WH	240	12	1000/1200/1100	3000/4000/5000	55


Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
YES	80	WHITE	90	103	57(H)
YES	80	WHITE		152	145(H)



Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

S9048

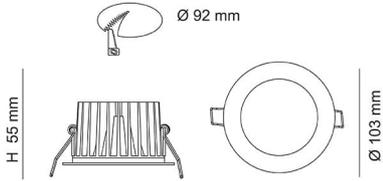

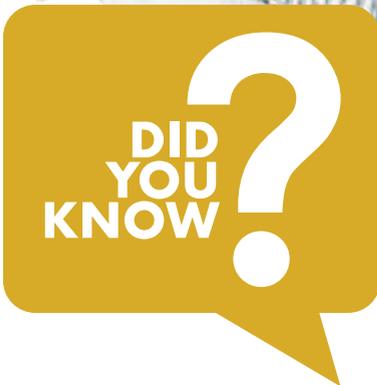

Before selecting a downlight look out for the marks of Compliance and Safety. Starting with the RCM mark, this signals that the product has been tested to all relevant Australian Safety standards, to ensure the product delivers its designed safety performance. In addition and when thermal insulation batts are installed in the ceiling cavity, look out of the IC rating to ensure the product is suitable for such an application.

