



ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375

Website: www.edg.net.au Email: brisbane@edg.net.au

C3843a - CAPALABA TAVERN

C3843a-0001(B).xls


ELECTRICAL SERVICES CONTRACT DOCUMENT SCHEDULE

REVISION B - 24 SEPTEMBER 2026

ISSUING INFORMATION				DATE OF ISSUE							
	DAY MONTH YEAR REASON FOR ISSUE			07	24						
				09	09						
				26	26						
				P	T						
A = APPROVAL C = CONSTRUCTION N = COORDINATION P = PRELIMINARY T = TENDER											

DISTRIBUTION				NUMBER OF COPIES							
WWW.EDG.NET.AU				1E	1E						
BSPN ARCHITECTURE				1E	1E						
P = PRINT T = TRACING D = DISC E = EMAIL F = FAX											

DOCUMENTS				REVISION							
C3843a-E01.dwg	LEGEND & DETAILS			A	B						
C3843a-E02.dwg	NOTES			A	B						
C3843a-E03.dwg	FLOOR PLAN			A	B						
C3843a-E04.dwg	REFLECTED CEILING PLAN			A	B						
C3843a-E05.dwg	JOINERY & WALL LIGHTING PLAN			A	B						
C3843a-E06.dwg	JOINERY & WALL LIGHTING DETAILS			A	B						
C3843a-0001.xls	CONTRACT DOCUMENT SCHEDULE			A	B						
C3843a-0002.xls	EQUIPMENT SCHEDULE				A						
C3843a-0004.xls	LIGHTING CONTROL SCHEDULE				A						
C3843a-0005.xls	DISTRIBUTION BOARD DB-A SCHEDULE				A						
C3843a-0006.xls	DISTRIBUTION BOARD DB-C SCHEDULE				A						
C3843a-0001.zip	FITTING & OUTLET DATASHEETS										

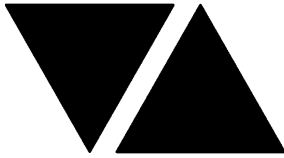

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au

C3843a - CAPALABA TAVERN


C3843a-0002(A).xls

ELECTRICAL EQUIPMENT SCHEDULE

REVISION A - 24 SEPTEMBER 2026

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK
www.edg.net.au/Links/Lighting.htm

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
L01	9W TRAILING EDGE DIMMABLE A60 240 VOLT E27 2700K LED LAMP	DECORATIVE 600 DIA PENDANT. CONFIRM THE SUSPENSION HEIGHT ON SITE WITH THE ARCHITECT	WHITE	ZEST LIGHTING CLOUD BALL WHITE PENDANT MEDIUM	A
L02	9W TRAILING EDGE DIMMABLE A60 240 VOLT E27 2700K LED LAMP	DECORATIVE 400 DIA PENDANT. CONFIRM THE SUSPENSION HEIGHT ON SITE WITH THE ARCHITECT	WHITE	ZEST LIGHTING CLOUD BALL WHITE PENDANT SMALL	A
L03	INTEGRATED TRAILING EDGE DIMMABLE 3000K LED LAMP	DECORATIVE 1540 LONG LINEAR PENDANT. CONFIRM THE SUSPENSION HEIGHT ON SITE WITH THE ARCHITECT	ACRYLIC BRONZE	ZEST LIGHTING MARIELLE FROSTED RIBBED ACRYLIC	A
L04	5W TRAILING EDGE DIMMABLE E14 240 VOLT 2700K LED LAMP	DECORATIVE 200 X 200 WALL LIGHT MOUNTED AS PER THE ARCHITECTURAL ELEVATION	BRUSHED COPPER	LOLIDAY CS100 SIZE 2 SQUARE COPPER SCONCE	A
L05	5W TRAILING EDGE DIMMABLE G4 240 VOLT 2700K LED LAMP	DECORATIVE 100 DIA WALL LIGHT MOUNTED AS PER THE ARCHITECTURAL ELEVATION	DARK RED	LOLIDAY ORB4 HARD WIRED	A
L06	9W TRAILING EDGE DIMMABLE A60 240 VOLT E27 2700K LED LAMP	DECORATIVE 405 DIA PENDANT. CONFIRM THE SUSPENSION HEIGHT ON SITE WITH THE ARCHITECT	WHITE	NOOK COLLECTION SOLE PENDANT LIGHT 405 DIA	A
L07	9W TRAILING EDGE DIMMABLE A60 240 VOLT E27 2700K LED LAMP	DECORATIVE 300 DIA PENDANT. CONFIRM THE SUSPENSION HEIGHT ON SITE WITH THE ARCHITECT	WHITE	NOOK COLLECTION SOLE PENDANT LIGHT 300 DIA	A
L08	2 X 5W TRAILING EDGE DIMMABLE GU10 240 VOLT 2700K LED LAMP	DUAL LAMP UP/DOWN DECORATIVE IP54 WALL LIGHT MOUNTED AS PER THE ARCHITECTURAL ELEVATION	BLACK	ZEST LIGHTING KYKLOP	A
L09	15W 2700K LED	RECESSED DOWNLIGHT C/W 60 DEG BEAM REMOTE DALI DIMMABLE DRIVER	WHITE	R1078-WH-15W-XW- 60-DALI	A
S1	14.4W/M 2700K LED	LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER RECESSED INTO THE REAR BAR JOINERY AS PER THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A

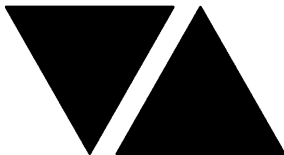

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au

C3843a - CAPALABA TAVERN

C3843a-0002(A).xls

ELECTRICAL EQUIPMENT SCHEDULE


REVISION A - 24 SEPTEMBER 2026

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK
www.edg.net.au/Links/Lighting.htm

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
S2	10W/M 2700K LED	IP67 LED FLEX STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER RECESSED INTO THE BAR COUNTER FACE AS PER THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS. CONFIRM THE BEND PLANE (TOP OR SIDE) ON SITE WITH THE ARCHITECT.	NATURAL	RAPID LED R2321 OR R2322 - 2700K + POWER SUPPLY & DALI CONTROLLER	A
S3	14.4W/M 2700K LED	LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER RECESSED INTO THE REAR BAR JOINERY AS PER THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A
S4	14.4W/M 2700K LED	LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER CONFIGURED IN A RECTANGLE AS PER THE S4 DETAIL MOUNTED WITHIN THE REAR BAR JOINERY PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A
S5	14.4W/M 2700K LED	LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER MOUNTED WITHIN THE BAR COUNTER BULKHEAD AS PER THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A
S6	10W/M 2700K LED	IP67 LED FLEX STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER RECESSED INTO THE TOP OF THE SEATING AS PER THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS. CONFIRM THE BEND PLANE (TOP OR SIDE) ON SITE WITH THE ARCHITECT.	NATURAL	RAPID LED R2321 OR R2322 - 2700K + POWER SUPPLY & DALI CONTROLLER	A
S7	14.4W/M 2700K LED	LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER CONFIGURED IN A RECTANGLE AS PER THE S7 DETAIL MOUNTED BEHIND THE TV. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A

C3843a-0002(A).xls

Pages inc. any attach. 2 of 5

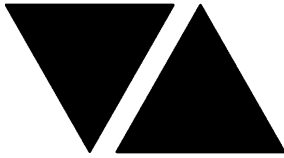

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au

C3843a - CAPALABA TAVERN


C3843a-0002(A).xls

ELECTRICAL EQUIPMENT SCHEDULE

REVISION A - 24 SEPTEMBER 2026

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK
www.edg.net.au/Links/Lighting.htm

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
S8	14.4W/M 2700K LED	LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER RECESSED INTO THE REAR BAR JOINERY AS PER THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A
S9	14.4W/M 2700K LED	LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER CONFIGURED IN A RECTANGLE AS PER THE S4 DETAIL MOUNTED WITHIN THE REAR BAR JOINERY PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A
S10	14.4W/M 2700K LED	TWO RUNS OF LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER WITHIN THE CEILING PELMET AS PER THE DETAIL AND THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A
S11	14.4W/M 2700K LED	LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER WITHIN THE CEILING PELMET AS PER THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A
S12	14.4W/M 2700K LED	LED STRIP WITHIN A SCREW FIXED EXTRUSION C/W DIFFUSER WITHIN THE TAB PELMET AS PER THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH REMOTE DALI DIMMABLE POWER SUPPLIES AS REQUIRED LOCATE THE POWER SUPPLIES IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DOCUMENTS.	NATURAL	RAPID LED R2334 2700 K PLUS ALUMINIUM EXTRUSION OPAL DIFFUSER AND POWER SUPPLY & DALI CONTROLLER	A

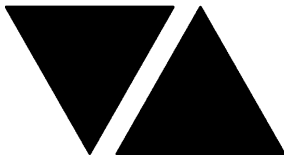

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au

C3843a - CAPALABA TAVERN

C3843a-0002(A).xls

ELECTRICAL EQUIPMENT SCHEDULE


REVISION A - 24 SEPTEMBER 2026

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK
www.edg.net.au/Links/Lighting.htm

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
FS01	1W LED AT 500 CENTRES	FESTOON LIGHTS WITH NEW 24V DC IP65 FESTOON LIGHTING TO BE FIXED TO A 316 STAINLESS STEEL WIRE SUPPORT SYSTEM. SUPPLY THE NEW FESTOON LIGHTS VIA REMOTE DALI DIMMABLE DRIVERS IN A CONCEALED ACCESSIBLE POSITIONS NOTED ON THE AS CONSTRUCTED DOCUMENTS. CONFIRM THE LENGTH AND POSITION ON SITE	BLACK CABLE AND FIXINGS 316 STAINLESS STEEL SUPPORT AND FIXINGS	FIRE FLY FFC-LS-50-24VE27-BK	A
HRE		EXISTING HEATER AND ASSOCIATED CONTROLS TO BE RETAINED / REINSTATED.			A
E1	LED	EMERGENCY LIGHT: RECESSED NON-MAINTAINED EMERGENCY LIGHT. AS2293 CLASSIFICATION C0-D40 - C90-D40.	WHITE	CLEVERTRONICS CLIFE	A
EX	LED	EXIT LIGHT : MAINTAINED 24M VIEWING DISTANCE EXIT LIGHT C/W DIFFUSERS & DIRECTIONAL ARROWS AS SHOWN. CEILING OR WALL MOUNT BETWEEN 2100mm & 2700mm AFFL IF THERE IS NO VERTICAL SURFACE TO MOUNT THE FITTING ON WITHIN THIS RANGE CONFIRM THE MOUNTING HEIGHT WITH THE ENGINEER. LITHIUM ION BATTERY	WHITE	CLEVERTRONICS CSBLED	A
CHANNEL x		CONTROL CHANNEL WITH A NUMERICAL REFERENCE. REFER TO THE POWER AND LIGHTING CONTROL SCHEDULE			A
LIGHTING CONTROL SWITCH PANEL 1 (SP1)		6-BUTTON PROGRAMMABLE SWITCH PANEL C/W CENTRAL LCD DISPLAY MOUNTED AT 1000mm AFFL UNLESS NOTED OTHERWISE.	ALUMINIUM	DYNALITE ANTUMBRA DISPLAY	A
LIGHTING CONTROL SWITCH PANEL 2 (SP2)		6-BUTTON PROGRAMMABLE SWITCH PANEL C/W CENTRAL LCD DISPLAY MOUNTED AT 1000mm AFFL UNLESS NOTED OTHERWISE.	ALUMINIUM	DYNALITE ANTUMBRA DISPLAY	A
LIGHTING CONTROL SWITCH PANEL 3 (SP3)		6-BUTTON PROGRAMMABLE SWITCH PANEL C/W CENTRAL LCD DISPLAY MOUNTED AT 1000mm AFFL UNLESS NOTED OTHERWISE.	ALUMINIUM	DYNALITE ANTUMBRA DISPLAY	A
SINGLE POWER OUTLET		SINGLE POWER OUTLET C/W CIRCUIT IDENTIFICATION ON THE FACEPLATE BEHIND THE SURROUND MOUNT AT 300mm AFFL U.N.O. RATING 10A U.N.O.	WHITE UNLESS NOTED AS BLACK (BK)	CLIPSAL C2000 SERIES	A
DOUBLE POWER OUTLET		DOUBLE POWER OUTLET C/W CIRCUIT IDENTIFICATION ON THE FACEPLATE BEHIND THE SURROUND MOUNT AT 300mm AFFL U.N.O. RATING 10A U.N.O.	WHITE UNLESS NOTED AS BLACK (BK)	CLIPSAL C2000 SERIES	A
IP56 SINGLE POWER OUTLET		SINGLE POWER OUTLET IP56 MOUNT AT 300mm AFFL U.N.O. RATING 10A U.N.O.	GREY	CLIPSAL 56 SERIES	A

C3843a-0002(A).xls

Pages inc. any attach. 4 of 5

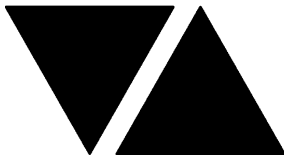

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au

C3843a - CAPALABA TAVERN


C3843a-0002(A).xls

ELECTRICAL EQUIPMENT SCHEDULE

REVISION A - 24 SEPTEMBER 2026

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK
www.edg.net.au/Links/Lighting.htm

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
SINGLE-PHASE ISOLATOR		SINGLE-PHASE WEATHERPROOF ISOLATOR. MOUNT AT 1350mm AFFL U.N.O. RATING 20A U.N.O. CONNECT TO EQUIPMENT VIA FLEXIBLE CONDUIT.	-	CLIPSAL WHT20	A
THREE-PHASE ISOLATOR		THREE-PHASE WEATHERPROOF ISOLATOR. MOUNT AT 1350mm AFFL U.N.O. RATING 20A U.N.O. CONNECT TO EQUIPMENT VIA FLEXIBLE CONDUIT. "RSD" DENOTES ROLLER SHUTTER DOOR SUPPLY - COORDINATE LOCATION ONSITE WITH MOTOR.	-	CLIPSAL WHT35	A
SIGN CONNECTION		COORDINATE THE LOCATION AND CONNECTION WITH THE SIGN CONTRACTOR ENSURING THE CONNECTION ARE PROVIDED WITH APPROPRIATE WEATHER PROTECTION AND ARE CONCEALED FROM VIEW.			A
MSB		EXISTING MAIN SWITCHBOARD TO REMAIN.			A
MP		EXISTING RETAIL METER PANEL TO REMAIN.			A
DB-A		EXISTING DISTRIBUTION BOARD TO REMAIN. PROVIDE THE ADDITIONAL SWITCHGEAR TO ACCOMMODATE THE NEW DB-C SUPPLY AS PER THE NOTES.			A
DB-B		EXISTING DISTRIBUTION BOARD TO REMAIN. PROVIDE THE ADDITIONAL SWITCHGEAR TO ACCOMMODATE THE RELOCATED CIRCUITS AS PER THE NOTES.			A
DB-C		NEW DISTRIBUTION BOARD DB-C REFER TO THE NOTES AND DISTRIBUTION BOARD DB-C SCHEDULE FOR ADDITIONAL INFORMATION AND REQUIREMENTS. PROVIDE DB-B WITH A 4C+E 16mm SUBMAIN FROM A NEW 63A MCB IN DB-A. PROVIDE A SHOP DRAWING OF THE DB FOR APPROVAL INCLUDING ALL LIGHTING CONTROLS AS PART OF THE SHOP DRAWING.			A
DB-G		EXISTING DISTRIBUTION BOARD TO REMAIN. THE EXISTING CIRCUITS SUPPLIED FROM DB-G ARE TO BE RESUPPLIED FROM DB-B SUCH THAT DB-G REMAINS FOR THE EXCLUSIVE USE BY THE GAMING ELECTRICIAN.			A

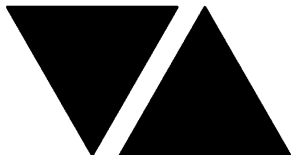

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au


C3843a - CAPALABA TAVERN

C3843a-0004(A).xls

LIGHTING CONTROL SCHEDULE

REVISION A - 24 SEPTEMBER 2026

MISCELLANEOUS EQUIPMENT				REV	
ITEM	DESCRIPTION			A	
SP1	AS DETAILED IN THE EQUIPMENT SCHEDULE			A	
SP2	AS DETAILED IN THE EQUIPMENT SCHEDULE			A	
SP3	AS DETAILED IN THE EQUIPMENT SCHEDULE			A	
CONTROL MODULE 1				A	
TYPE:		DYNALITE DDMC802		A	
DESCRIPTION		8CH MODULAR CONTROLLER		A	
LOCATION		DIN RAIL MOUNTED WITHIN DB-C		A	
BUS:		A		A	
CHANNEL	CONTROL	DESCRIPTION		A	
		LOCATION	CIRCUIT	USE	A
1	DGTM202	GAMING	DB-C -L1	L03	A
2		GAMING		L04	A
3	DGTM202	SPORTS BAR		L05	A
4		BISTRO		L02	A
5	DGTM202	BISTRO		L01 AND L02	A
6		TERRACE		LO06 AND L07	A
7					A
8					A
CONTROL MODULE 2				A	
TYPE:		DYNALITE DDRC1220FR-GL		A	
DESCRIPTION		12CH 20 A FEEDTHROUGH RELAY CONTROLLER		A	
LOCATION		DIN RAIL MOUNTED WITHIN DB-C		A	
BUS:		A		A	
CHANNEL	CONTROL	DESCRIPTION		A	
		LOCATION	CIRCUIT	USE	A
9	SWITCHED	EXTERNAL	DB-C- L2	SIGN	A
10	SWITCHED	EXTERNAL	DB-C- L2	SIGN	A
11	SWITCHED	EXTERNAL	DB-C- L2	SIGN	A
12	SWITCHED	BISTRO AMENITY	DB-C- L3	RESUPPLY EXISTING	A
13	SWITCHED	SPORTS BAR AMENITY	DB-C- L4	RESUPPLY EXISTING	A
14	SWITCHED	DECK	DB-C- L5	RESUPPLY EXISTING	A
15	SWITCHED	EXTERNAL	DB-C- L2	L08	A
16					A
17					A
18					A
19					A
20					A

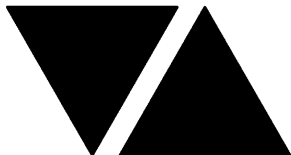

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au


C3843a - CAPALABA TAVERN

C3843a-0004(A).xls

LIGHTING CONTROL SCHEDULE

REVISION A - 24 SEPTEMBER 2026

CONTROL MODULE 3					A
TYPE:		DYNALITE DDBC1200			A
DESCRIPTION		12CH BOARD CAST DALI CONTROLLER			A
LOCATION		DIN RAIL MOUNTED WITHIN DB-C			A
BUS:		A			A
CHANNEL	CONTROL	DESCRIPTION			A
		LOCATION	CIRCUITS	USE	A
21	DALI DIM	GAMING	DB-C - L7	L09	A
22	DALI DIM	GAMING	DB-C - L7	L09	A
23	DALI DIM	GAMING	DB-C - L7	L09	A
24	DALI DIM	GAMING	DB-C - L7	L09	A
25	DALI DIM	ENTRY	DB-C - L8	L09	A
26	DALI DIM	EXTERNAL	DB-C - L8	L09	A
27	DALI DIM	TERRACE	DB-C - L8	L09	A
28	DALI DIM	KIDS	DB-C - L8	L09	A
29	DALI DIM	GAMING	DB-C - L6	S6	A
30	DALI DIM	GAMING	DB-C - L6	S2	A
31	DALI DIM	GAMING	DB-C - L6	S1	A
32	DALI DIM	GAMING	DB-C - L6	S1	A
CONTROL MODULE 4					A
TYPE:		DYNALITE DDBC1200			A
DESCRIPTION		12CH BOARD CAST DALI CONTROLLER			A
LOCATION		DIN RAIL MOUNTED WITHIN DB-C			A
BUS:		A			A
CHANNEL	CONTROL	DESCRIPTION			A
		LOCATION	CIRCUITS	USE	A
33	DALI DIM	BISTRO	DB-C - L9	L09	A
34	DALI DIM	BISTRO	DB-C - L9	L09	A
35	DALI DIM	BISTRO	DB-C - L9	S6	A
36	DALI DIM	BISTRO	DB-C - L9	S6	A
37	DALI DIM	BISTRO	DB-C - L10	L09	A
38	DALI DIM	BISTRO	DB-C - L10	L09	A
39	DALI DIM	BISTRO	DB-C - L10	S10	A
40	DALI DIM	BISTRO	DB-C - L9	L09	A
41	DALI DIM	BISTRO	DB-C - L11	S6	A
42	DALI DIM	BISTRO	DB-C - L11	S2	A
43	DALI DIM	BISTRO	DB-C - L11	S3	A
44	DALI DIM	BISTRO	DB-C - L11	S9	A

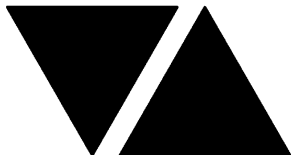

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au

C3843a - CAPALABA TAVERN

C3843a-0004(A).xls

LIGHTING CONTROL SCHEDULE

REVISION A - 24 SEPTEMBER 2026

CONTROL MODULE 5					A
TYPE:		DYNALITE DDBC1200			A
DESCRIPTION		12CH BOARD CAST DALI CONTROLLER			A
LOCATION		DIN RAIL MOUNTED WITHIN DB-C			A
BUS:		A			A
CHANNEL	CONTROL	DESCRIPTION			A
		LOCATION	CIRCUITS	USE	A
45	DALI DIM	BISTRO	DB-C - L11	S8	A
46	DALI DIM	SPORTS BAR	DB-C - L12	S7	A
47	DALI DIM	SPORTS BAR	DB-C - L12	S2	A
48	DALI DIM	SPORTS BAR	DB-C - L12	S3	A
49	DALI DIM	SPORTS BAR	DB-C - L12	S4	A
50	DALI DIM	SPORTS BAR	DB-C - L12	S5	A
51	DALI DIM	SPORTS BAR	DB-C - L12	S12	A
52	DALI DIM	SPORTS BAR	DB-C - L13	L09	A
53	DALI DIM	SPORTS BAR	DB-C - L13	L09	A
54	DALI DIM	SPORTS BAR	DB-C - L13	L09	A
55	DALI DIM	SPORTS BAR	DB-C - L13	L09	A
56	DALI DIM	SPORTS BAR	DB-C - L13	L09	A
CONTROL MODULE 6					A
TYPE:		DYNALITE DDBC1200			A
DESCRIPTION		12CH BOARD CAST DALI CONTROLLER			A
LOCATION		DIN RAIL MOUNTED WITHIN DB-C			A
BUS:		A			A
CHANNEL	CONTROL	DESCRIPTION			A
		LOCATION	CIRCUITS	USE	A
57	DALI DIM	SPORTS BAR	DB-C - L14	L09	A
58	DALI DIM	DECK	DB-C - L14	L09	A
59	DALI DIM	DECK	DB-C - L14	L09	A
60	DALI DIM	SPORTS BAR	DB-C - L14	L09	A
61	DALI DIM	EXTERNAL	DB-C - L15	L09	A
62	DALI DIM	DECK	DB-C - L15	FS01	A
63	DALI DIM	SPORTS BAR	DB-C - L16	CEILING FEATURE	A
64					A
65					A
66					A
67					A
68					A



ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375

Website: www.edg.net.au Email: brisbane@edg.net.au


C3843a - CAPALABA TAVERN

C3843a-0005(A).xls

DISTRIBUTION BOARD DB-A

REVISION A - 24 SEPTEMBER 2026

							REV
PROVIDE THE EXISTING DISTRIBUTION BOARD WITH THE FOLLOWING SWITCHGEAR. REMOVE ANY SWITCHGEAR MADE REDUNDANT BY THE WORKS AND UPDATE THE SCHEDULE AT PRACTICVAL COMPLETION.							A
CIRC	PH	CIRCUIT BREAKER (amps)	CONTROL EQUIPMENT	CABLE SIZE (mm ²)	LOCATION	CIRCUIT USE	A
P1	1	20	RCBO	2.5	GAMING	TV	A
P2	1	20	RCBO	2.5	GAMING	CLEANING	A
P3	1	25	RCBO	4.0	BISTRO	TV	A
P4	1	20	RCBO	2.5	KITCHEN	CO2	A
P5	1	20	RCBO	4.0	DECK	TV	A
P6	1	20	RCBO	2.5	KITCHEN	REF	A
P7	1	32	RCBO	6.0	KITCHEN	PIZZA	A
P8	3	63	MCB	16.0	PLANT	DB-C	A
							A
							A
							A
							A
							A

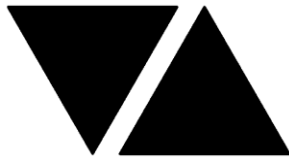

ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375

Website: www.edg.net.au Email: brisbane@edg.net.au

C3843a - CAPALABA TAVERN

C3843a-0006(A).xls

DISTRIBUTION BOARD DB-C

REVISION A - 24 SEPTEMBER 2026

FAULT CURRENT: 6KA							100 AMP NON AUTO LOAD BREAK	REV
CHASSIS SIZE: 36 POLE								A
CHASSIS RATING: 250A								A
PHASES: 3								A
MAIN SWITCH:							REFER TO THE EQUIPMENT SCHEDULE AND NOTES FOR ADDITIONAL REQUIREMENTS. PROVIDE THE DB WITH A FULL WIDTH EMPTY DIN RAIL TO ACCOMMODATE FUTURE CONTACTORS AND CONTROLS IN ADDITION TO THE CONTROLS INCLUDING THE DYNALITE EQUIPMENT PROVIDED AS PART OF THE INITIAL WORKS. PROVIDE THE DB WITH AN AS2293 EMERGENCY LIGHTING CONTROL SYSTEM TO CONTROL THE ASSOCIATED EMERGENCY LIGHTS. PROVIDE THE DB WITH SURGE PROTECTION. ENSURE THE SCHEDULE INCLUDES THE CIRCUIT USE AND LOCATION.	A
SUPPLY CABLE: 4C16+E								
SOURCE: DB-A								
CIRC	PH	CIRCUIT BREAKER (amps)	CONTROL EQUIPMENT	CABLE SIZE (mm ²)	LOCATION	CIRCUIT USE	A	
L1	1	20	RCBO	2.5	GENERAL	LIGHTING	A	
L2	1	20	RCBO	2.5	EXTERNAL	SIGNAGE	A	
L3	1	20	RCBO	2.5	BISTRO AMENITY	LIGHTING	A	
L4	1	20	RCBO	2.5	SPORTS BAR AMENITY	LIGHTING	A	
L5	1	20	RCBO	2.5	DECK	LIGHTING	A	
L6	1	20	RCBO	2.5	GAMING	LIGHTING	A	
L7	1	20	RCBO	2.5	GAMING	LIGHTING	A	
L8	1	20	RCBO	2.5	EXTERNAL	LIGHTING	A	
L9	1	20	RCBO	2.5	BISTRO	LIGHTING	A	
L10	1	20	RCBO	2.5	BISTRO	LIGHTING	A	
L11	1	20	RCBO	2.5	BISTRO	LIGHTING	A	
L12	1	20	RCBO	2.5	SPORTS BAR	LIGHTING	A	
L13	1	20	RCBO	2.5	SPORTS BAR	LIGHTING	A	
L14	1	20	RCBO	2.5	DECK	LIGHTING	A	
L15	1	20	RCBO	2.5	DECK	LIGHTING	A	
L16	1	20	RCBO	2.5	SPORTS BAR	CEILING FEATURE	A	
							A	
							A	
							A	
							A	
							A	
							A	
							A	

LEGEND

-  ELECTRICAL SERVICES SWITCHBOARD.
-  SWITCHBOARD / CONTROL PANEL NOT PROVIDED AS PART OF THE ELECTRICAL SUBCONTRACT.
-  EXISTING POWER OUTLET AS NOTED.
-  SINGLE POWER OUTLET.
-  DOUBLE POWER OUTLET.
-  TV POWER OUTLET, POSITION CONFIRMED WITH AV CONTRACTOR.
-  SIGNAGE CONNECTION.
-  SINGLE PHASE ISOLATOR.
-  THREE PHASE ISOLATOR.

SPx LIGHTING CONTROL SWITCH PANEL, TYPE x.

CIRCUIT LINE.

SWITCH LINE.

DB-x - Py POWER CIRCUIT DESIGNATION. DENOTES DB AND CIRCUIT.

xx LIGHTING CONTROL CHANNEL REFERENCE.

ELECTRICAL EQUIPMENT AS NOTED.

REFER TO DETAIL NOTED FOR THE AREA SHOWN HATCHED. ADDITIONAL OUTLETS & FITTINGS MAY BE SHOWN ON DETAIL.

E1: GENERAL CEILING RECESSED LED EMERGENCY LIGHT, WHITE.

EX: EMERGENCY LED EXIT LIGHT, WHITE.

FS01: DECK DALI DIMMABLE BLACK FESTOON LIGHTING.

H01: EXISTING EXTERNAL CEILING HEATER AND CONTROL TO BE RETAINED.

L01: BISTRO PENDANT.

L02: BISTRO PENDANT.

L03: GAMING BAR COUNTER PENDANT.

L04: GAMING ROOM WALL LIGHT.

L05: SPORTS BAR WALL LIGHT.

L06: TERRACE PENDANT.

L07: TERRACE PENDANT.

L08: MAIN ENTRY WALL LIGHT.

L09: DALI DIMMABLE RECESSED DOWNLIGHT WHITE.

S1: GAMING BAR REAR WALL SHELVING DALI DIMMABLE LED STRIP LIGHT.

S2: BAR COUNTER DALI DIMMABLE LED STRIP LIGHT.

S3: BAR REAR WALL SHELVING DALI DIMMABLE LED STRIP LIGHT.

S4: SPORTS BAR REAR WALL DALI DIMMABLE LED STRIP LIGHT.

S5: SPORTS BAR OVERHEAD GANTRY DALI DIMMABLE LED STRIP LIGHT.

S6: BANQUETTE SEATING DALI DIMMABLE LED STRIP LIGHT.

S7: TV SURROUND DALI DIMMABLE LED STRIP LIGHT.

S8: DISPLAY SHELVING DALI DIMMABLE LED STRIP LIGHT.

S9: BAR REAR WALL DALI DIMMABLE LED STRIP LIGHT.

LEGEND

S10: BISTRO FEATURE CEILING PELMET DALI DIMMABLE LED STRIP LIGHT.

S11: GAMING FEATURE CEILING PELMET DALI DIMMABLE LED STRIP LIGHT.

S12: TAB PELMET DALI DIMMABLE LED STRIP LIGHT.

EQUIPMENT:

TEST - TEST PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

RESET - RESET PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

LAMP - AMBER TEST INDICATING LAMP MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.


Ta - ADJUSTABLE 0-3 HOUR TIMED RELAY.

Tb - 15 MINUTE RUN-ON TIMER TO OPERATE UPON THE RETURN OF MAINS POWER.

Cx - CONTACTOR x.

CRx - CONTROL RELAY x.

Rx - RELAY x.

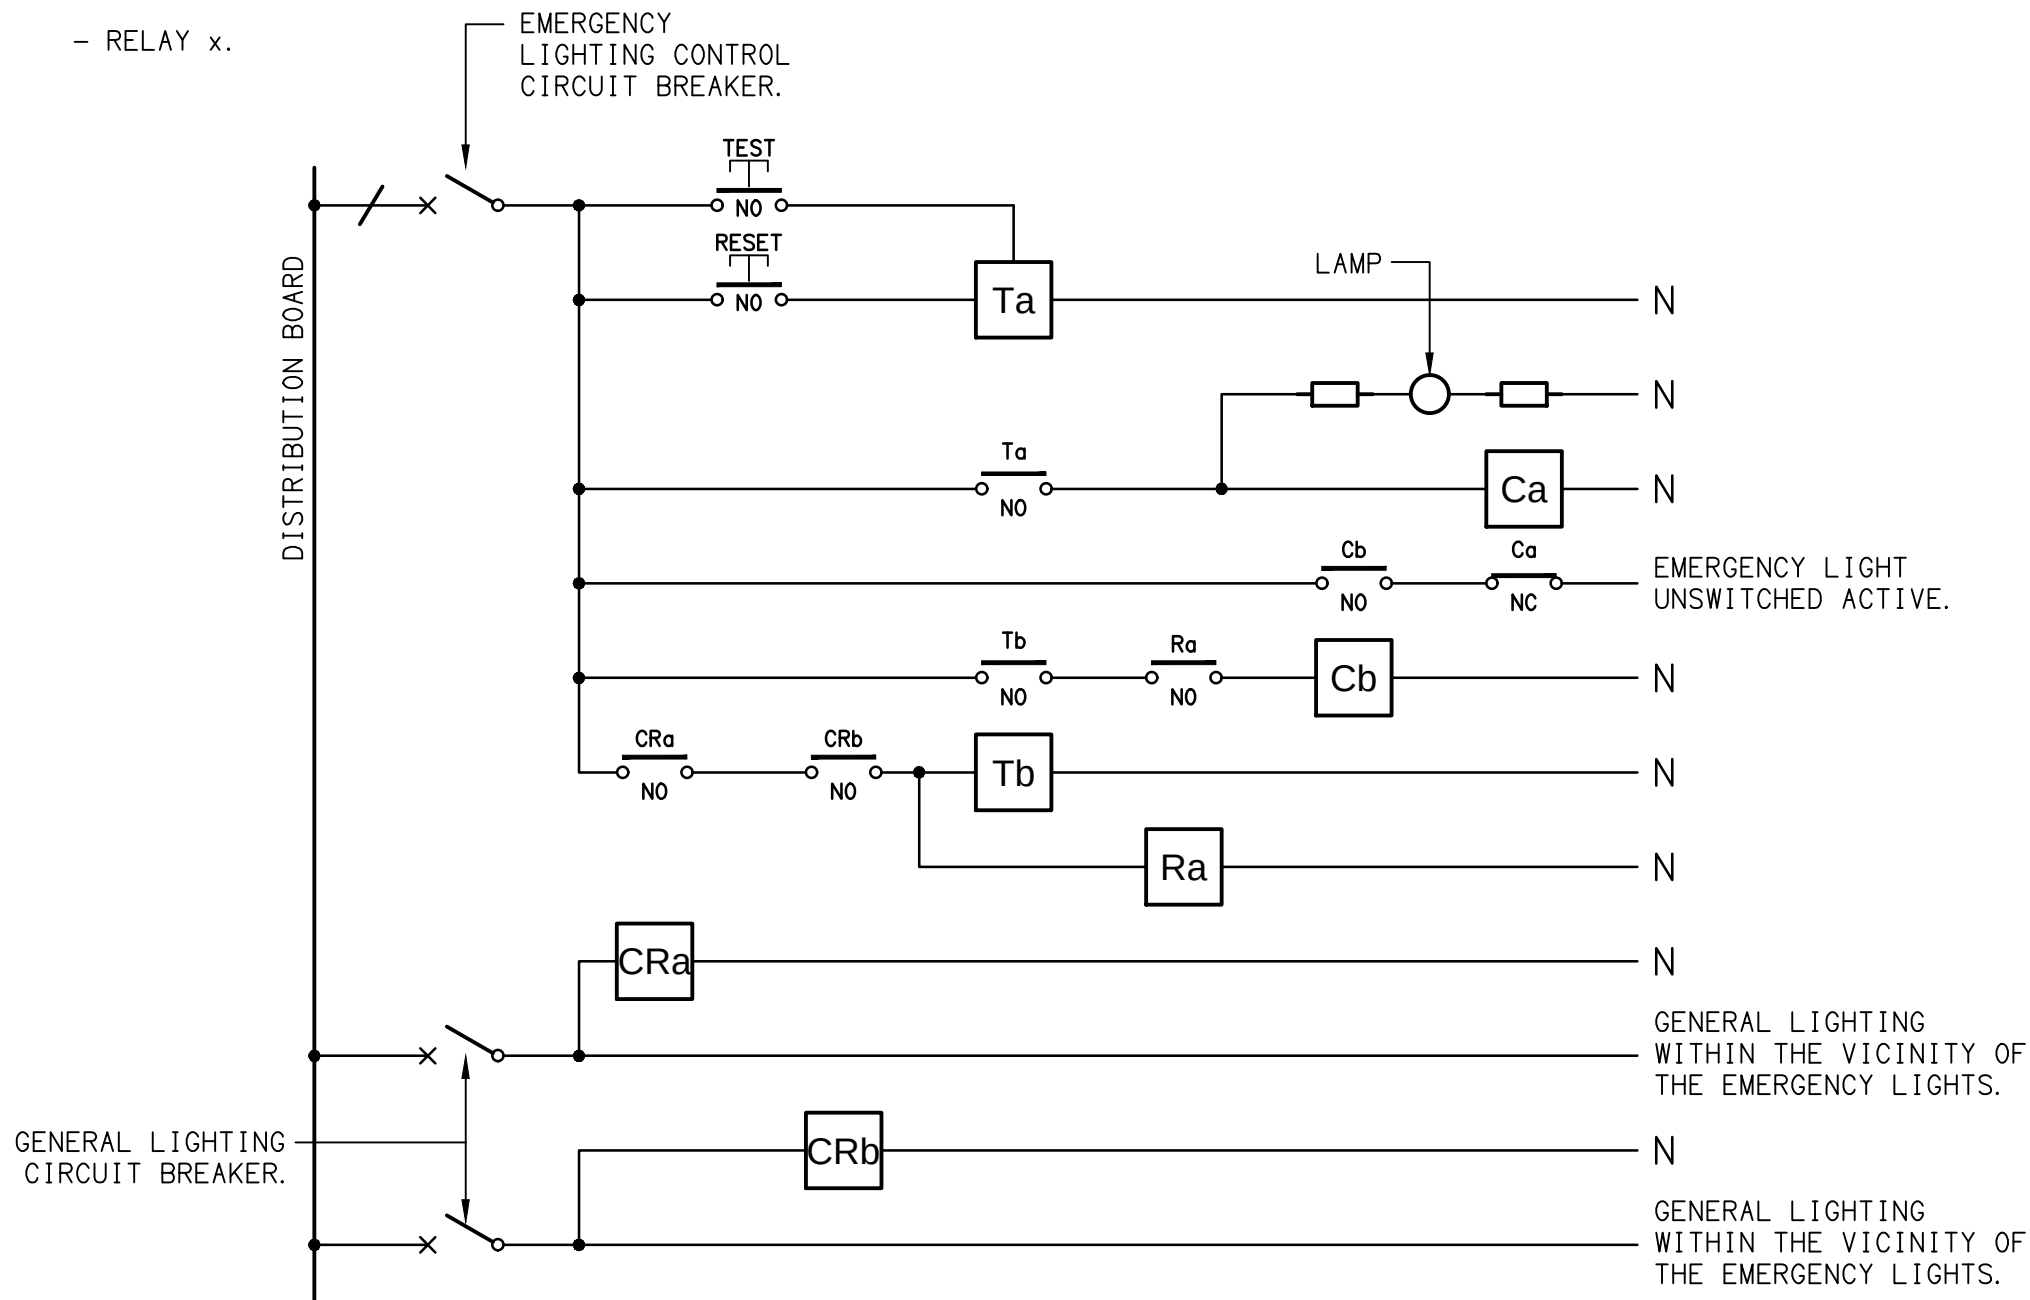


NOTES

1. THE EMERGENCY LIGHT UNSWITCHED ACTIVE / GENERAL LIGHTING SWITCHED ACTIVE CIRCUIT ARRANGEMENT AND CONTROL IS TYPICAL FOR ALL CIRCUITS SUPPLYING EMERGENCY LIGHTS.

2. PROVIDE ADDITIONAL CONTROL RELAYS (CRx) CONFIGURED AS PER CRa AND CRb FOR ALL ADDITIONAL LIGHTING CIRCUITS THAT SUPPLY LIGHTS IN THE VICINITY OF THE EMERGENCY LIGHTS.

SCHEMATIC

EMERGENCY LIGHTING
NOT TO SCALE

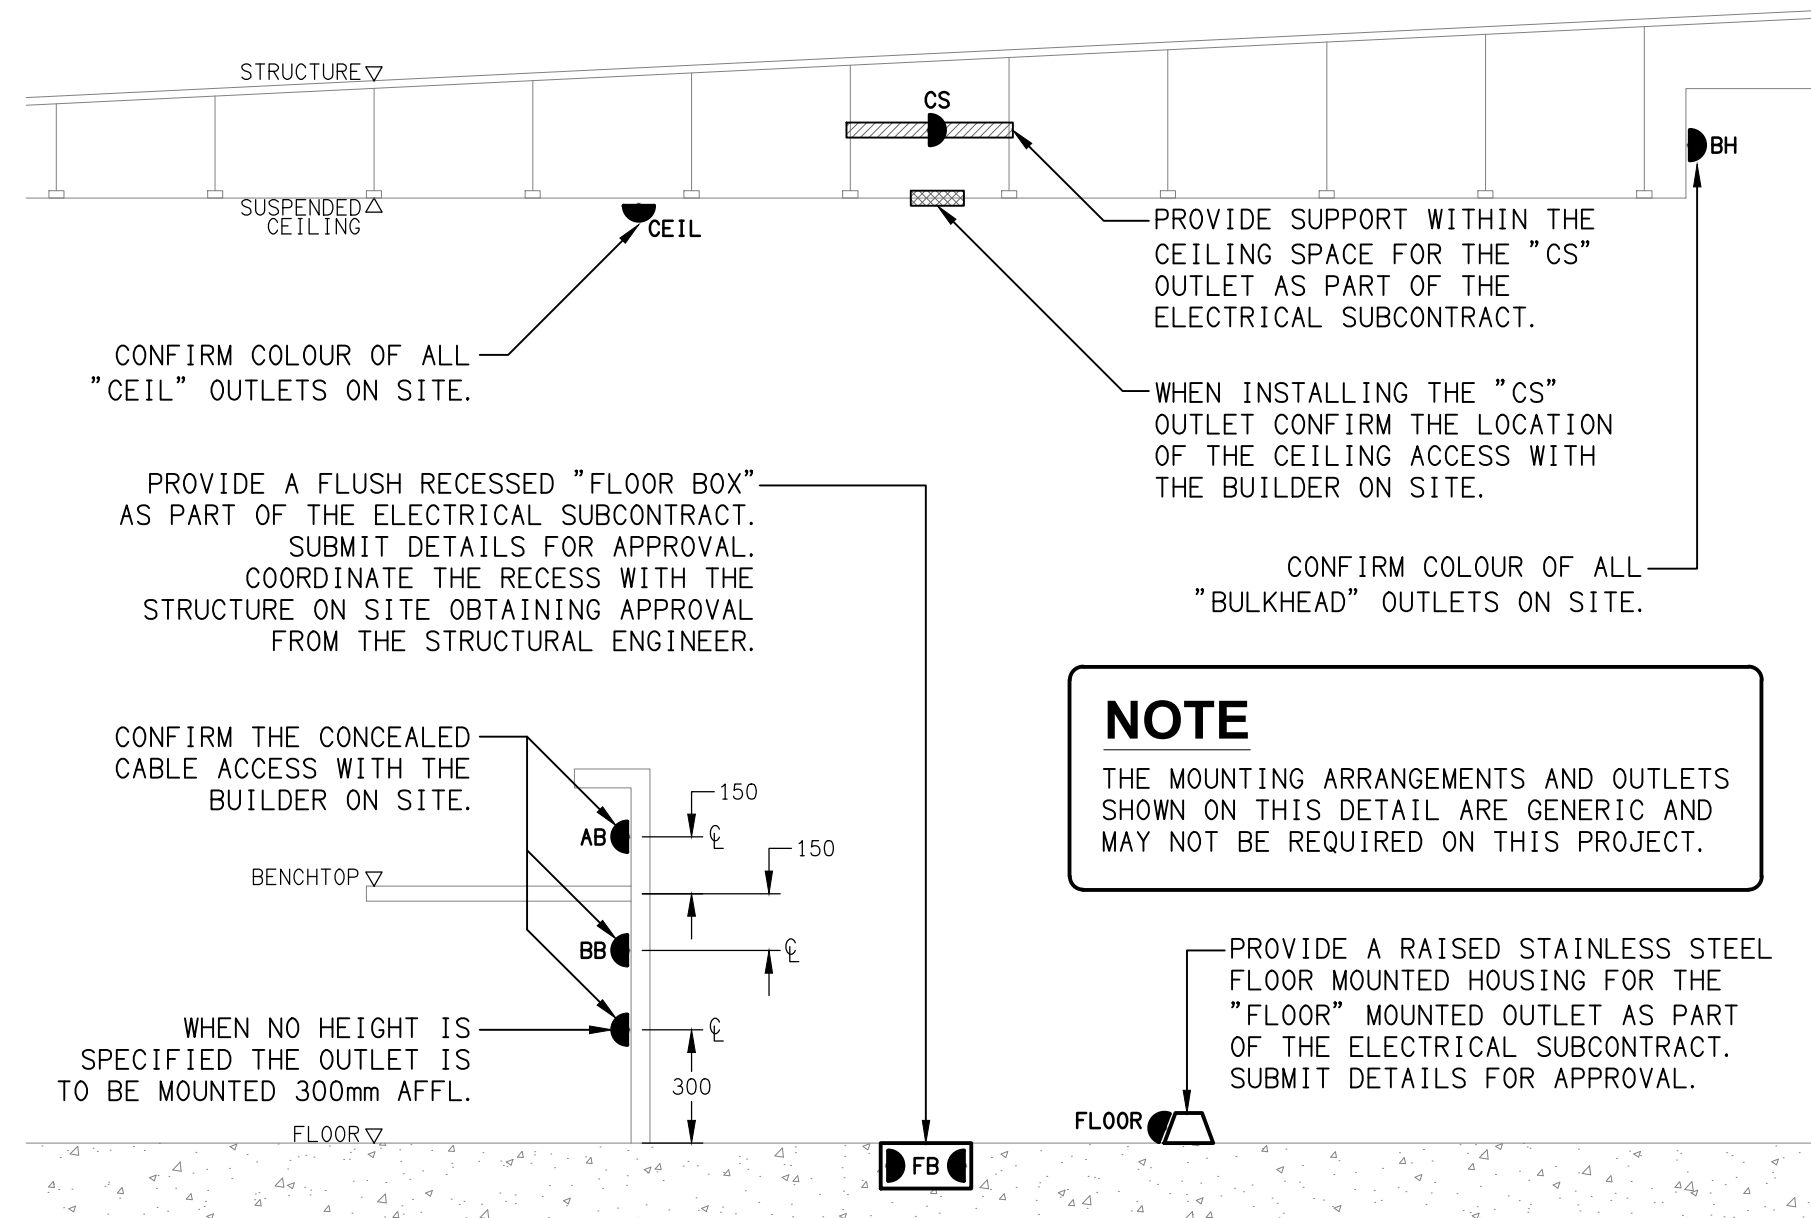

DETAIL

TYPICAL OUTLET MOUNTINGS
NOT TO SCALE

ELECTRICAL DESIGN GROUP BRISBANE PTY LTD ACN 092 710 793 TRADING AS: ELECTRICAL DESIGN GROUP	THE COPYRIGHT OF THIS DRAWING REMAINS THE PROPERTY OF THE ELECTRICAL DESIGN GROUP.	 ELECTRICAL DESIGN GROUP ELECTRICAL BUILDING SERVICES CONSULTANTS BRISBANE GOLD COAST P.O.Box 15, Sherwood Q.4075 Phone: (07) 3278 4375 Email: brisbane@edg.net.au Web: www.edg.net.au	PROJECT: CAPALABA TAVERN	DRAWING: ELECTRICAL SERVICES LEGEND & DETAILS		
	USE FIGURED DIMENSIONS IN PREFERENCE TO SCALE.		30 OLD CLEVELAND ROAD, CAPALABA, QUEENSLAND	SCALE: NOT TO SCALE AT A1		
	ALL DIMENSIONS TO BE VERIFIED ONSITE.		PROJECT NO: C3843a			
			DRAWING NO: E01			
				REVISION: B		

NOTES

1. EXTENT OF WORKS

THE ELECTRICAL SERVICES SUB-CONTRACT INCLUDES BUT IS NOT LIMITED TO THE FOLLOWING:
- SUPPLY AND INSTALLATION OF ALL COMPONENTS FORMING PART OF THE ELECTRICAL SERVICES.
- INSPECTIONS.
- TESTING AND COMMISSIONING.
- MAINTENANCE.
- CABLING, CABLE SUPPORT SYSTEMS AND ACCESS.
- POWER DISTRIBUTION.
- LIGHTING.
- MODIFICATION, RELOCATION AND EXTENSION AS NECESSARY OF ALL EXISTING SERVICES THAT ARE IMPACTED BY THE WORKS OR REQUIRED TO BE EXTENDED BY THE WORKS.
- REMOVAL OF ALL EXISTING SERVICES MADE REDUNDANT BY THE WORKS.
- DOCUMENTS.
- ANY TEMPORARY WORKS REQUIRED TO KEEP THE HOTEL OPERATING DURING THE CONSTRUCTION PROCESS AND ACCOMMODATE STAGING OF THE WORKS TO REFLECT THE EXECUTION OF THE MAIN CONTRACT WORKS.
- ALL MINOR COMPONENTS AND INCIDENTAL WORKS NOT SPECIFICALLY REFERRED TO, HOWEVER NECESSARY TO COMPLETE THE ELECTRICAL SERVICES INSTALLATION SUCH THAT IT IS HANDED OVER COMPLETE, OPERATIONAL AND FIT FOR THE INTENDED USE.

PRIOR TO COMMENCING WORK CONSULT SITE MANAGEMENT FOR ANY HAZARDOUS MATERIAL AND OR ASBESTOS REGISTERS AS WELL AS UNDERTAKE A THOROUGH INSPECTION OF THE SITE TO IDENTIFY ANY POTENTIAL HAZARDOUS MATERIALS, ASBESTOS AND HEALTH OR SAFETY RISKS. ADVISE THE CONTRACTOR OF ANY POTENTIAL HAZARDOUS MATERIALS, ASBESTOS AND HEALTH OR SAFETY RISKS IF IDENTIFIED AND DO NOT COMMENCE WORK UNTIL AN APPROPRIATE MANAGEMENT PLAN HAS BEEN DEVELOPED AND AGREED TO BY ALL PARTIES.

SUPPLY ALL LABOUR, MATERIALS, EQUIPMENT, AND ALL OTHER ITEMS, WHETHER MENTIONED IN DETAIL OR NOT, REQUIRED FOR THE SATISFACTORY COMPLETION OF THE ELECTRICAL SERVICES INSTALLATION, LEAVING IN FULL WORKING ORDER TO THE SATISFACTION OF THE PROJECT MANAGER.

ACCEPT FULL RESPONSIBILITY FOR LIASING, ARRANGING AND CO-ORDINATION OF ALL WORKS THAT HAVE AN EFFECT ON OR WILL BE AFFECTED BY THE ELECTRICAL SERVICES.

REFER TO THE EQUIPMENT SCHEDULE FOR ADDITIONAL REQUIREMENTS.

2. WORKMANSHIP

ENSURE THAT THE ELECTRICAL WORK IS PERFORMED BY THE HOLDER OF A CURRENT ELECTRICAL SUB CONTRACTOR LICENSE AND THE SERVICES COVERED BY THE ACMA IS PERFORMED BY THE HOLDER OF THE APPROPRIATE CURRENT ACMA LICENSE. ENSURE THE INSTALLATION AND ALL COMPONENTS, FIXTURES, FITTINGS, OUTLETS AND CABLES ARE SUPPLIED AND INSTALLED TO A HIGH STANDARD THROUGHOUT, AND INSTALLED IN A NEAT AND TRADESMAN LIKE MANNER, TO THE CURRENT INDUSTRY STANDARDS. ENSURE ALL MATERIALS AND COMPONENTS OF A SIMILAR TYPE ARE OF THE SAME MANUFACTURER AND INSTALLED IN A UNIFORM MANNER.

IT IS THE ELECTRICAL SUB CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE INSTALLATION IS FIT FOR PURPOSE AND IS PROVIDED AS A COMPLETE WORKING INSTALLATION. IT IS THE ELECTRICAL SUB CONTRACTOR'S RESPONSIBILITY TO PROVIDE ALL COMPONENTS, FITTINGS, FIXTURES, SYSTEMS, PROGRAMMING ETC IRRESPECTIVE OF THE LEVEL DETAILED IN THE DOCUMENTS SUCH THAT THE INSTALLATION IS PROVIDED AS A COMPLETE WORKING INSTALLATION.

CONCEAL ALL WIRING AND CONDUITS. EXPOSED CABLING OR CONDUITS ARE GENERALLY NOT ACCEPTABLE. IT IS NOTED THAT CHASING AND REINSTATEMENT WILL BE REQUIRED. ENSURE ALL COMPONENTS, EQUIPMENT AND MATERIALS SUPPLIED ARE NEW, UNUSED, DESIGNED AND SELECTED TO ENSURE SATISFACTORY OPERATION UNDER VARYING ATMOSPHERIC, CLIMATIC, HUMID TROPICAL CONDITIONS WITHOUT DISTORTION AND DETERIORATION IN ANY PART AFFECTING EFFICIENCY AND RELIABILITY OF THE SYSTEMS. DESIGN AND SELECT ALL EQUIPMENT TO PROVIDE THE NECESSARY SAFETY TO HUMAN LIFE AND PROPERTY DURING OPERATION AND MAINTENANCE WITH PARTICULAR ATTENTION GIVEN TO ELECTRICAL SAFETY AND SEGREGATION PRECAUTIONS.

CHECK THE FINISHED PAINTWORK AROUND THE AREA OF EACH INSTALLATION AND TOUCH UP ALL DAMAGED PARTS AND FINISHES AFTER THE INSTALLATION OF THE ELECTRICAL SERVICES.

ALL WORKS ARE TO BE CARRIED OUT IN ACCORDANCE WITH THE BUILDER'S PROGRAM. ENSURE ALL FINAL LOCATIONS OF OUTLETS AND FITTINGS ARE CO-ORDINATED ONSITE WITH THE ARCHITECT AND ALL OTHER SERVICES, TO THE APPROVAL OF THE PROJECT MANAGER. ALLOW TO CO-ORDINATE THE FINAL LOCATION OF ALL EQUIPMENT, FITTINGS, & OUTLETS, SUCH THAT THEY ARE INSTALLED IN ACCORDANCE WITH THE AS3000 RESTRICTED ZONES, AND ARE NOT COVERED INAPPROPRIATELY.

ENSURE THAT ALL METAL SURFACES ARE SUITABLY PROTECTED AGAINST CORROSION, AND THAT ALL PLASTIC MATERIALS ARE UV STABILISED.

PROVIDE ALL MATERIALS AS NEW, AND OF THE HIGHEST CLASS AVAILABLE FOR THEIR RESPECTIVE TYPES. ENSURE ALL ASPECTS OF THE WORK ARE OF A HIGH STANDARD THROUGHOUT, AND INSTALLED IN A NEAT AND TRADESMAN LIKE MANNER, TO THE CURRENT INDUSTRY STANDARDS.

MODIFICATION, RELOCATION AND EXTENSION AS NECESSARY OF ALL EXISTING SERVICES THAT ARE IMPACTED BY THE WORKS OR REQUIRED TO BE EXTENDED BY THE WORKS.

PROVIDE ALL TEMPORARY WORKS REQUIRED TO KEEP THE VENUE AND ALL CONSTRUCTION STAGES OPERATING INCLUDING STAGED COMMISSIONING DURING THE CONSTRUCTION PROCESS.

ALL MINOR COMPONENTS AND INCIDENTAL WORKS NOT SPECIFICALLY REFERRED TO, HOWEVER NECESSARY TO COMPLETE THE ELECTRICAL SERVICES INSTALLATION SUCH THAT IT IS HANDED OVER COMPLETE, OPERATIONAL AND FIT FOR THE INTENDED USE.

CORRUGATED CONDUITS MUST NOT BE USED WITHIN ANY FOOD OR DRINK PREPARATION OR SERVERY AREAS.

CABLE JOINS ARE NOT ACCEPTABLE. ALL CABLING, WIRING, CONDUCTORS AND CONDUITS MUST BE CONCEALED. ALL EXISTING ELECTRICAL SERVICES INCLUDING CABLING AND SWITCHGEAR THAT IS FOUND TO BE REDUNDANT OR MADE REDUNDANT BY THE WORKS MUST BE REMOVED.

IT IS ACCEPTABLE TO USE EXISTING SWITCHGEAR, OUTLETS AND CABLING IF THEY ARE APPROPRIATELY RATED AND THE ELECTRICIAN ACCEPTS RESPONSIBILITY OVER THE SWITCHGEAR / OUTLETS / CABLE AND PROVIDES A WARRANTY OVER IT AS IF IT WAS INSTALLED NEW BY THE ELECTRICIAN.

3. STANDARDS

IRRESPECTIVE OF INFORMATION CONTAINED IN THE ELECTRICAL SERVICES DOCUMENTS OR IN INSTRUCTIONS, IT IS THE ELECTRICAL SUB CONTRACTORS RESPONSIBILITY TO ENSURE ALL ELECTRICAL SERVICES WORKS ARE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF THE FOLLOWING. REFER ANY DISCREPANCIES BETWEEN THE REQUIREMENTS OF THE FOLLOWING AND/OR THE ELECTRICAL SERVICES DOCUMENTS AND INSTRUCTIONS TO THE ARCHITECT FOR CLARIFICATION PRIOR TO THE PLACING OF ORDERS, FABRICATION OR INSTALLATION OF THE ITEMS/METHODS IN DISCREPANCY.
- NCC BUILDING CODE OF AUSTRALIA.
- ELECTRICITY ACT.
- ELECTRICAL SAFETY ACT.
- AS/NZS3000.
- AS3008.
- WORKPLACE HEALTH AND SAFETY ACT.
- TELECOMMUNICATIONS ACT.
- ACMA REQUIREMENTS.

NOTES

4. AUTHORITIES

ENSURE ALL OF THE ELECTRICAL SERVICES COMPLY WITH THE REQUIREMENTS OF ALL REGULATORY AUTHORITIES HAVING JURISDICTION OVER THE SITE INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
- ACMA.
- LOCAL COUNCIL.
- LOCAL SUPPLY AUTHORITY.
- STATE GOVERNMENT DEPARTMENT OF ENVIRONMENT AND HERITAGE.
- QLD GOVERNMENT, DIVISION OF WORKPLACE, HEALTH AND SAFETY.
- QLD FIRE AND EMERGENCY SERVICES.

5. DOCUMENTATION

WITHIN TWO WEEKS OF PRACTICAL COMPLETION PROVIDE THE FOLLOWING DOCUMENTATION.

AS CONSTRUCTED DRAWINGS INCLUDING:
- ELECTRICIANS NAME AND CONTACT DETAILS.
- PROJECT NAME, ADDRESS AND DATE OF PRACTICAL COMPLETION.
- FITTING POSITIONS AND TYPES CROSS REFERENCED TO A FITTING / EQUIPMENT SCHEDULE.
- OUTLET, SWITCH, AND CONNECTION POSITIONS CROSS REFERENCED TO A FITTING / EQUIPMENT SCHEDULE.
- REMOTE DRIVER LOCATIONS.
- CIRCUITS CROSS REFERENCED TO A DISTRIBUTION BOARD SCHEDULE.
- LIGHTING CONTROL CHANNELS CROSS REFERENCED TO A LIGHTING CONTROL SCHEDULE.
- POWER SCHEMATIC.
- SWITCHBOARD SHOP DRAWINGS.
- CABLE ACCESS ROUTES.

A FITTING / EQUIPMENT SCHEDULE INCLUDING.
- FITTING DETAILS INCLUDING THE MANUFACTURERS CATALOGUE NUMBERS WITH THE TYPES CROSS REFERENCED TO THE AS CONSTRUCTED DRAWINGS.
- OUTLETS AND SWITCHES INCLUDING THE MANUFACTURERS CATALOGUE NUMBERS WITH THE TYPES CROSS REFERENCED TO THE AS CONSTRUCTED DRAWINGS.

DISTRIBUTION BOARD SCHEDULES CROSS REFERENCED TO THE AS CONSTRUCTED DRAWINGS.

LIGHTING CONTROL SCHEDULE CROSS REFERENCED TO THE AS CONSTRUCTED DRAWINGS.

PHOTOS OF EACH SWITCHBOARD INCLUDING:
- CLOSED POSITION SUCH THAT THE SWITCHBOARD DESIGNATION AND CLEARANCE IS VISIBLE.
- THE SUBMAIN LABEL.
- DOOR/S OPEN ESCUTCHEON/S CLOSED SUCH THAT THE SPARE CAPACITY AND LABELLING IS VISIBLE.
- DOOR/S OPEN ESCUTCHEON/S REMOVED SUCH THAT THE SWITCHGEAR AND INTERNAL CABLING IS VISIBLE.

6. CABLES

UNLESS OTHERWISE SPECIFIED, INSTALL AND TERMINATE CABLES IN ACCORDANCE WITH THE MANUFACTURERS' RECOMMENDATIONS. DETERMINE THE FINAL ROUTES TO SUIT THE BUILDING STRUCTURE AND SITE CONDITIONS. UNLESS NOTED OTHERWISE, PROVIDE ALL 240 VOLT POWER AND LIGHTING WIRING AS 2.5mm² TWIN & EARTH STRANDED COPPER CONDUCTORS, PVC INSULATED 0.6/1kV V75 GRADE TO AS3174, PROTECTED BY A 20 AMP CIRCUIT BREAKER. ALL CONDUIT AND FITTINGS TO BE RIGID UPVC TO AS2053, UNLESS NOTED OTHERWISE.

7. POWER DISTRIBUTION

PROVIDE A NEW DISTRIBUTION BOARD DB-C SUPPLIED FROM A NEW 63 AMP THREE PHASE MCB IN DB-A VIA A 4C+E 16mm Cu XLPE/PVC SUBMAIN.

THE EXISTING CIRCUITS SUPPLIED FROM DB-G THAT REMAIN ARE TO BE RESUPPLIED FROM DB-B VIA NEW SWITCHGEAR SUCH THAT DB-G IS EMPTY AND AVAILABLE FOR THE EXCLUSIVE USE OF THE GAMING ELECTRICIAN.

ALL SWITCHBOARDS AND SWITCHGEAR ARE TO BE NHP TO MATCH THE EXISTING AND CONTAIN AT LEAST 25% OR 12 SPARE POLES (WHICHEVER IS THE LARGER) AT PRACTICAL COMPLETION. ALL SWITCHBOARDS ARE TO BE LIGHT GREY. ORANGE SWITCHBOARDS ARE NOT ACCEPTABLE. PROVIDE 92268 KEY LOCKABLE DOORS ON ALL SWITCHBOARDS. ALL SWITCHBOARDS AND CIRCUITS MUST BE UNIQUELY NAMED WITH SWITCHBOARDS PROVIDED WITH A LABEL CONTAINING:
- SOURCE NAME.
- SOURCE OVERLOAD RATING IN AMPS.
- SUBMAIN CABLE TYPE, SIZE, CONFIGURATION AND LENGTH.

ALL REMOVABLE PANELS AND ESCUTCHEONS MUST BE SECURED VIA 1/4 TURN LATCHES THAT REMAIN PART OF THE PANEL / ESCUTCHEON. IT IS NOT ACCEPTABLE TO SECURE REMOVABLE PANELS AND ESCUTCHEONS BY BOLTS, NUTS OR SCREWS.

ALL CIRCUIT BREAKERS AND CIRCUIT SCHEDULES MUST BE LABELLED / CONTAIN THE SUBMAIN / CIRCUIT USE AND LOCATION SUCH THAT THE CONNECTION / OUTLET CAN BE SIMPLY IDENTIFIED.

OUTLETS ARE TO BE PROVIDED WITH A NEAT HAND WRITTEN CIRCUIT DESIGNATION BY INDELIBLE INK ON THE FACEPLATE SUCH THAT IT IS NOT VISIBLE WHEN THE COVER IS CONCEALED.

REFER TO THE DISTRIBUTION BOARD SCHEDULES FOR ADDITIONAL REQUIREMENTS AND CIRCUIT DETAILS.

ENSURE ALL THREE PHASE CIRCUITS ARE PROVIDED WITH CORRECT PHASE ROTATION.

ENSURE ALL OUTLETS AND ISOLATORS ARE POSITIONED SUCH THAT THEY ARE NOT COVERED BY THE EQUIPMENT. THE FINAL POSITION OF ALL OUTLETS AND ISOLATORS ARE TO BE CONFIRMED ON SITE BY THE TENANTS REPRESENTATIVE.

NOTES

8. GAMING

THE GAMING ELECTRICIAN WILL BE ENGAGED DIRECTLY BY ENDEAVOUR GROUP TO UNDERTAKE THE FOLLOWING:
- COMMUNICATIONS CABLING.
- CIRCUITS FROM THE GAMING DB (DB-G) AS NECESSARY TO:
- GAMING MACHINES.
- GAMING MODEMS.
- GAMING MACHINE SIGNAGE.
- GAMING ROOM CRTS.
- TAB OUTLETS.
- GAMING ROOM CABLE ACCESS EXCLUDING FLOOR CHASES AND REINSTATEMENT OF THE FLOOR CHASES.

ALL OTHER REMAINING ELECTRICAL SERVICES WITHIN THE GAMING ROOM ARE TO BE PROVIDED AS PART OF THE BUILDING WORKS ELECTRICAL SUB CONTRACT.

9. LIGHTING

THE EXISTING MANUAL LIGHTING CONTROL SYSTEM IS TO BE REMOVED AND REPLACED WITH A NEW PHILIPS DYNALITE LIGHTING CONTROL SYSTEM WITH THE CONTROLLERS LOCATED IN DB-C. ALL OF THE EXISTING LIGHTING CIRCUITS ARE TO BE REPLACED. ALL FRONT OF HOUSE LIGHTING IS TO BE 2,700K OR 3,000K AND THE BACK OF HOUSE LIGHTING IS TO BE 4,000K.

UNLESS A FITTING HAS BEEN SPECIFIED IN THE EQUIPMENT SCHEDULE THAT CONTAINS A MAIN VOLTAGE LAMP, ALL LIGHT FITTINGS MUST BE PROVIDED AS SOLID-STATE LED WITH A FIVE-YEAR MANUFACTURERS REPLACEMENT WARRANTY AND A MINIMUM TWO YEAR MANUFACTURERS REPLACEMENT AND LABOUR WARRANTY.

ALL FRONT OF HOUSE LIGHTS THAT DO NOT CONTAIN A MAIN VOLTAGE LAMP ARE TO BE DALI DIMMABLE.

REMOTE DRIVERS ARE TO BE USED IF POSSIBLE AND LOCATED IN A CONCEALED ACCESSIBLE POSITION. IF THE DRIVER CAN NOT BE REACHED FROM THE FITTING ITS POSITION MUST BE NOTED ON THE AS CONSTRUCTED DOCUMENTS.

ALL FRONT OF HOUSE LIGHTS THAT CONTAIN MAIN VOLTAGE LAMPS ARE TO BE PROVIDED WITH THE LOWEST OUTPUT PRACTICAL TO ACHIEVE THE REQUIRED ILLUMINATION / EFFECT AND BE TRAILING EDGE PHASE DIMMABLE.

ALL ILLUMINATED SIGNAGE, GAMING BASE FOOTREST LEDS, CARPARK LIGHTS, AND EXTERNAL SECURITY LIGHTS NOT CONSIDERED FRONT OF HOUSE ARE TO BE SWITCHED.

ALL LIGHTING CIRCUITS MUST BE PROTECTED BY A 20 AMP RCBO WITH THE AVERAGE NUMBER OF FITTINGS / DRIVERS SUPPLIED FROM A SINGLE CIRCUIT NOT EXCEEDING 25 WITH THE MAXIMUM NOT EXCEEDING 30.

CONFIGURE THE LIGHTING CONTROL SYSTEM TO CONTROL THE LIGHTING CONFIGURED WITH THE FOLLOWING SCENES:

INTERNAL

- CLEANING - MANUAL OPERATION. 100% LIGHTS ON AND SIGNS OFF.
- DAY - AUTOMATIC OPERATION FROM 10.00 AM TO 3.30 PM.
- AFTERNOON - AUTOMATIC OPERATION FROM 3.30 PM TO DUSK.
- EVENING - AUTOMATIC OPERATION FROM DUSK TO 8.30 PM.
- NIGHT - AUTOMATIC OPERATION FROM 8.30 PM TO CLOSING.
- CLOSED - MANUAL OPERATION. 100% ON FOR 15 MINUTES THEN TO A SECURITY MODE.

EXTERNAL

- DAY - AUTOMATICALLY OFF FROM DAWN TO DUSK.
- NIGHT - AUTOMATICALLY ON FROM DUSK UNTIL 15 MINUTES PAST CLOSING.
- CLOSED - MANUAL OPERATION. NIGHT MODE FOR 15 MINUTES THEN TO A SECURITY MODE.

SET THE ILLUMINATION LEVELS IN CONSULTATION WITH THE VENUE MANAGER AND OBTAIN WRITTEN APPROVAL FROM THE VENUE MANAGER OF THEIR ACCEPTANCE OF THE ILLUMINATION SCENE LEVELS FOR EACH STAGED HANDOVER AND SUBMIT A COPY OF THE APPROVAL TO THE ARCHITECT.

EACH FUNCTIONAL AREA IS TO BE PROVIDED WITH A SWITCH PANEL IN A NON-CUSTOMER ACCESSIBLE POSITION WITH THE ABILITY TO MANUALLY INSTIGATE THE ABOVE SCENES.

DIN RAIL MOUNT THE LIGHTING CONTROL EQUIPMENT WITHIN DB-C.

ALL OF THE LIGHT FITTINGS, LAMPS AND ACCESSORIES ARE TO BE PROVIDED AS PART OF THIS CONTRACT. THE LIGHTING COMPONENT OF THIS CONTRACT INCLUDES, BUT IS NOT LIMITED TO THE FOLLOWING EXTENT OF WORK:
- LIGHTING.
- LIGHT FITTINGS AND ACCESSORIES.
- EMERGENCY AND EXIT LIGHTING.
- EARTHING OF THE LIGHTING INSTALLATION.
- LIGHTING CONTROL.
- PHILIPS DYNALITE CONTROL LIGHTING CONTROL SYSTEM.
- LIGHTING SUBCIRCUITS.
- TESTING AND COMMISSIONING.
- RECONNECTION OF THE EXISTING LIGHTING THAT REMAINS.
- REMOVAL OF ALL EXISTING REDUNDANT LIGHTING SERVICES INCLUDING THE REDUNDANT LIGHTING CONTROL SYSTEM.

COMMISSION THE LIGHTING CONTROL AT PRACTICAL COMPLETION AND AGAIN THREE TIMES DURING THE DEFECTS AND LIABILITY PERIOD TO THE SATISFACTION OF THE OPERATOR.

NOTES

10. EMERGENCY AND EXIT LIGHTING

WITH THE EXCEPTION OF THE EXISTING KITCHEN EMERGENCY LIGHTS SUPPLIED FROM DB-1 REPLACE THE ENTIRE EMERGENCY LIGHTING SYSTEM WITH A NEW EMERGENCY LIGHTING SYSTEM SUPPLIED FROM DB-4.

PROVIDE A SINGLE POINT EMERGENCY LIGHTING SYSTEM THAT COMPLIES WITH THE LATEST ISSUE OF ALL PARTS AS2293 AND THE RELEVANT PARTS OF THE NCC BCA. INSTALL EMERGENCY LIGHT FITTINGS NOMINATED AS MAINTAINED WITH THE LAMP PERMANENTLY ON SUPPLIED VIA AN UNSWITCHED ACTIVE MAINS SUPPLY WHEN THE MAINS SUPPLY IS AVAILABLE. WHEN THE MAINS SUPPLY IS NOT AVAILABLE, THE LAMP IS TO REMAIN ON SUPPLIED BY THE EMERGENCY PACK. SINGLE LAMP MAINTAINED EMERGENCY LIGHTS ARE NOT SWITCHED WITH THE LOCAL GENERAL AREA LIGHTING. (THE LAMP IS ALWAYS ON.)

INSTALL EMERGENCY LIGHT FITTINGS NOMINATED AS NON-MAINTAINED AS FOLLOWS:
- IF THE FITTING IS NOT BEING SWITCHED, THE LAMP IS TO REMAIN OFF WHEN THE MAINS SUPPLY IS AVAILABLE. WHEN THE MAINS SUPPLY IS NOT AVAILABLE THE LAMP IS TO BE SWITCHED ON SUPPLIED BY THE EMERGENCY PACK. UNSWITCHED SINGLE LAMP NON-MAINTAINED EMERGENCY LIGHTS ARE NOT SWITCHED WITH THE LOCAL GENERAL AREA LIGHTING. (THE LAMP IS ON ONLY WHEN THE MAINS SUPPLY IS NOT AVAILABLE.)
- IF THE FITTING IS BEING SWITCHED, THE LAMP IS TO BE SUPPLIED AND CONTROLLED WITH THE LOCAL GENERAL AREA LIGHTING WHEN THE MAINS SUPPLY IS AVAILABLE. WHEN THE MAINS SUPPLY IS NOT AVAILABLE THE LAMP IS TO BE SWITCHED ON, SUPPLIED BY THE EMERGENCY PACK. (THE LAMP IS ON WHEN TURNED ON WITH THE LOCAL GENERAL LIGHTING OR THE MAIN SUPPLY IS NOT AVAILABLE.)

INSTALL EMERGENCY LIGHTS SUCH THAT THE STATUS INDICATOR L.E.D. IS CLEARLY VISIBLE AND THE TEST BUTTONS ARE READILY ACCESSIBLE. LABEL EACH CIRCUIT BREAKER WHICH CONTROLS THE UNSWITCHED ACTIVE TO EXIT LIGHTS WITH A LABEL FIXED ADJACENT; ENGRAVED PLASTIC LAMINATE, GREEN BACKGROUND WITH WHITE CHARACTERS: -

WARNING
INTERRUPTING SUPPLY WILL DISCHARGE
EMERGENCY LIGHTING BATTERIES

PROVIDE WRITTEN EVIDENCE OF THE INITIAL COMMISSIONING AND TESTING AND TESTING FOR THE DURATION OF THE MAINTENANCE PERIOD IN ACCORDANCE WITH AS 2293.2.

THIS EVIDENCE IS TO BE IN THE FORM OF A LOG BOOK SIMILAR TO THE GENERAL LIGHTING SERVICE PTY LTD "EMERGENCY LIGHTING MAINTENANCE LOG BOOK AND MANUAL" WHICH IS TO BE PROVIDED BY THE ELECTRICAL SUB-CONTRACTOR AND HAVE ALL ENTRIES FULLY COMPLETED AND BE PRESENTED FOR INSPECTION AT PRACTICAL COMPLETION. THE LOG BOOK IS TO BE RETAINED BY THE ELECTRICAL SUB-CONTRACTOR FOR THE DURATION OF THE MAINTENANCE PERIOD, AND THE SIX MONTHLY TEST AND MAINTENANCE RESULTS ENTERED. THE LOG BOOK IS TO BE PRESENTED FOR APPROVAL AT FINAL COMPLETION (EXPIRY OF THE MAINTENANCE PERIOD) AND WILL BE FORWARDED TO THE OPERATOR FOR THEIR USE.


PROVIDE MAINTENANCE OF THE EMERGENCY AND EXIT LIGHTING INSTALLATION INCLUDING RECORDS IN ACCORDANCE WITH THE LATEST ISSUE OF ALL PARTS AS2293 AND THE RELEVANT PARTS OF THE NCC BCA. PROVIDE THE EMERGENCY LIGHTING SYSTEM WITH A SUPPLY SENSING AND TESTING FACILITY IN ACCORDANCE WITH AS 2293.1.

11. ABBREVIATIONS

A - AMP CURRENT RATING
AB - MOUNT ABOVE BENCH.
AFFL - ABOVE FINISHED FLOOR LEVEL.
BB - MOUNT BELOW BENCH.
BH - MOUNT ON BULKHEAD.
CEIL - MOUNT ON CEILING.
CS - MOUNT WITHIN CEILING SPACE.
C/W - COMPLETE WITH.
DW - DISHWASHER.
MCB - MINIATURE CIRCUIT BREAKER.
MCCB - MOLDED CASE CIRCUIT BREAKER.
MSB - MAIN SWITCHBOARD.
MSSB - MECHANICAL SERVICES SWITCHBOARD.
MW - MICROWAVE.
N - NEON / LED INDICATOR WHEN ON.
NTS - NOT TO SCALE.
RCBO - CIRCUIT BREAKER C/W AN INTEGRAL 30mA RESIDUAL CURRENT DEVICE.
RCD - CIRCUIT PROTECTED VIA A 30mA RESIDUAL CURRENT DEVICE.
REF - REFRIGERATOR.
UNO - UNLESS NOTED OTHERWISE.
WP - WEATHERPROOF TO IP56 UNO.
500 - NUMBER DENOTES MOUNTING HEIGHT AFFL.

ELECTRICAL DESIGN GROUP BRISBANE PTY LTD ACN 092 710 793		THE COPYRIGHT OF THIS DRAWING REMAINS THE PROPERTY OF THE ELECTRICAL DESIGN GROUP.		PROJECT: CAPALABA TAVERN		B TENDER 24/09/2026	
TRADING AS: ELECTRICAL DESIGN GROUP		USE FIGURED DIMENSIONS IN PREFERENCE TO SCALE.		REV: DESCRIPTION: DATE:		DRAWING: ELECTRICAL SERVICES NOTES	
ALL DIMENSIONS TO BE VERIFIED ONSITE.		P.O.Box 15, Sherwood Q.4075 Phone: (07) 3278 4375 Email: brisbane@edg.net.au Web: www.edg.net.au		30 OLD CLEVELAND ROAD, CAPALABA, QUEENSLAND		SCALE: NOT TO SCALE AT A1	
		ELECTRICAL DESIGN GROUP		GOLD COAST		PROJECT NO: C3843a	
						DRAWING NO: E02	
						REVISION: B	

NOTE:
REFER TO DRAWING C3843a-E05.dwg FOR THE
ADDITIONAL JOINERY & WALL LIGHTING PLAN.

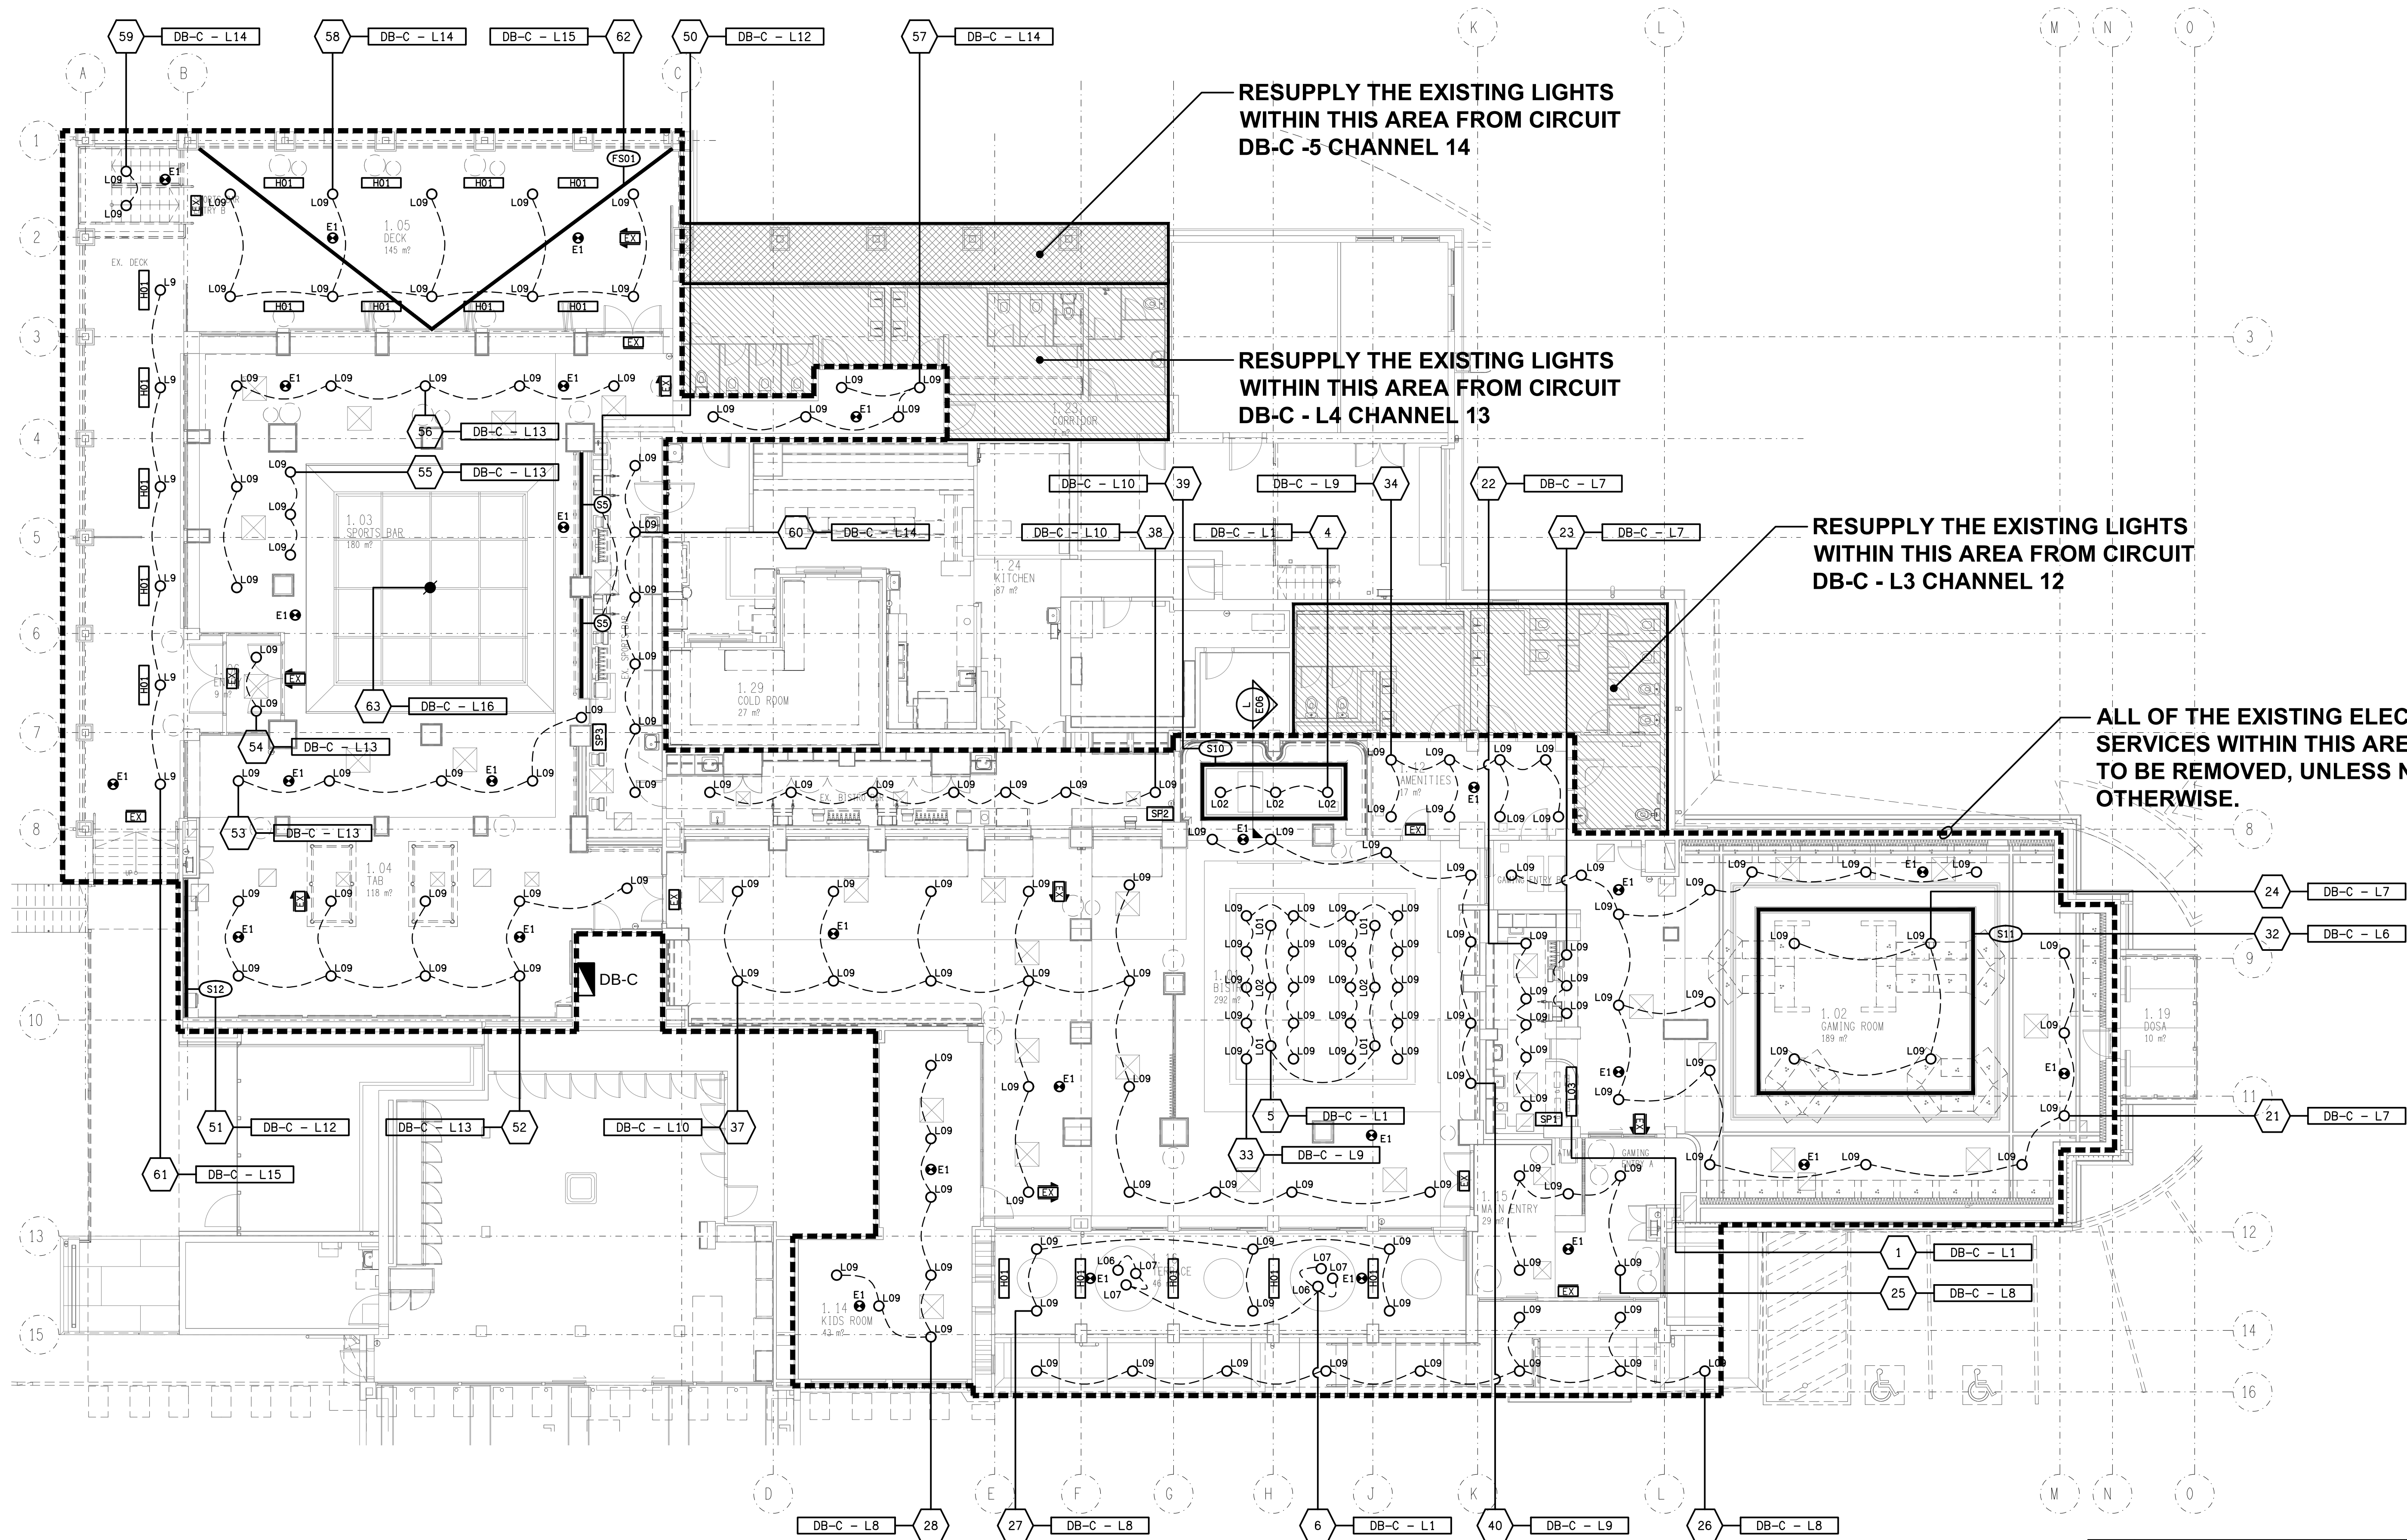



RESUPPLY THE EXISTING LIGHTS
WITHIN THIS AREA FROM CIRCUIT
DB-C -5 CHANNEL 14

RESUPPLY THE EXISTING LIGHTS
WITHIN THIS AREA FROM CIRCUIT
DB-C - L4 CHANNEL 13


RESUPPLY THE EXISTING LIGHTS
WITHIN THIS AREA FROM CIRCUIT
DB-C - L3 CHANNEL 12

ALL OF THE EXISTING ELECTRICAL
SERVICES WITHIN THIS AREA ARE
TO BE REMOVED, UNLESS NOTED
OTHERWISE.

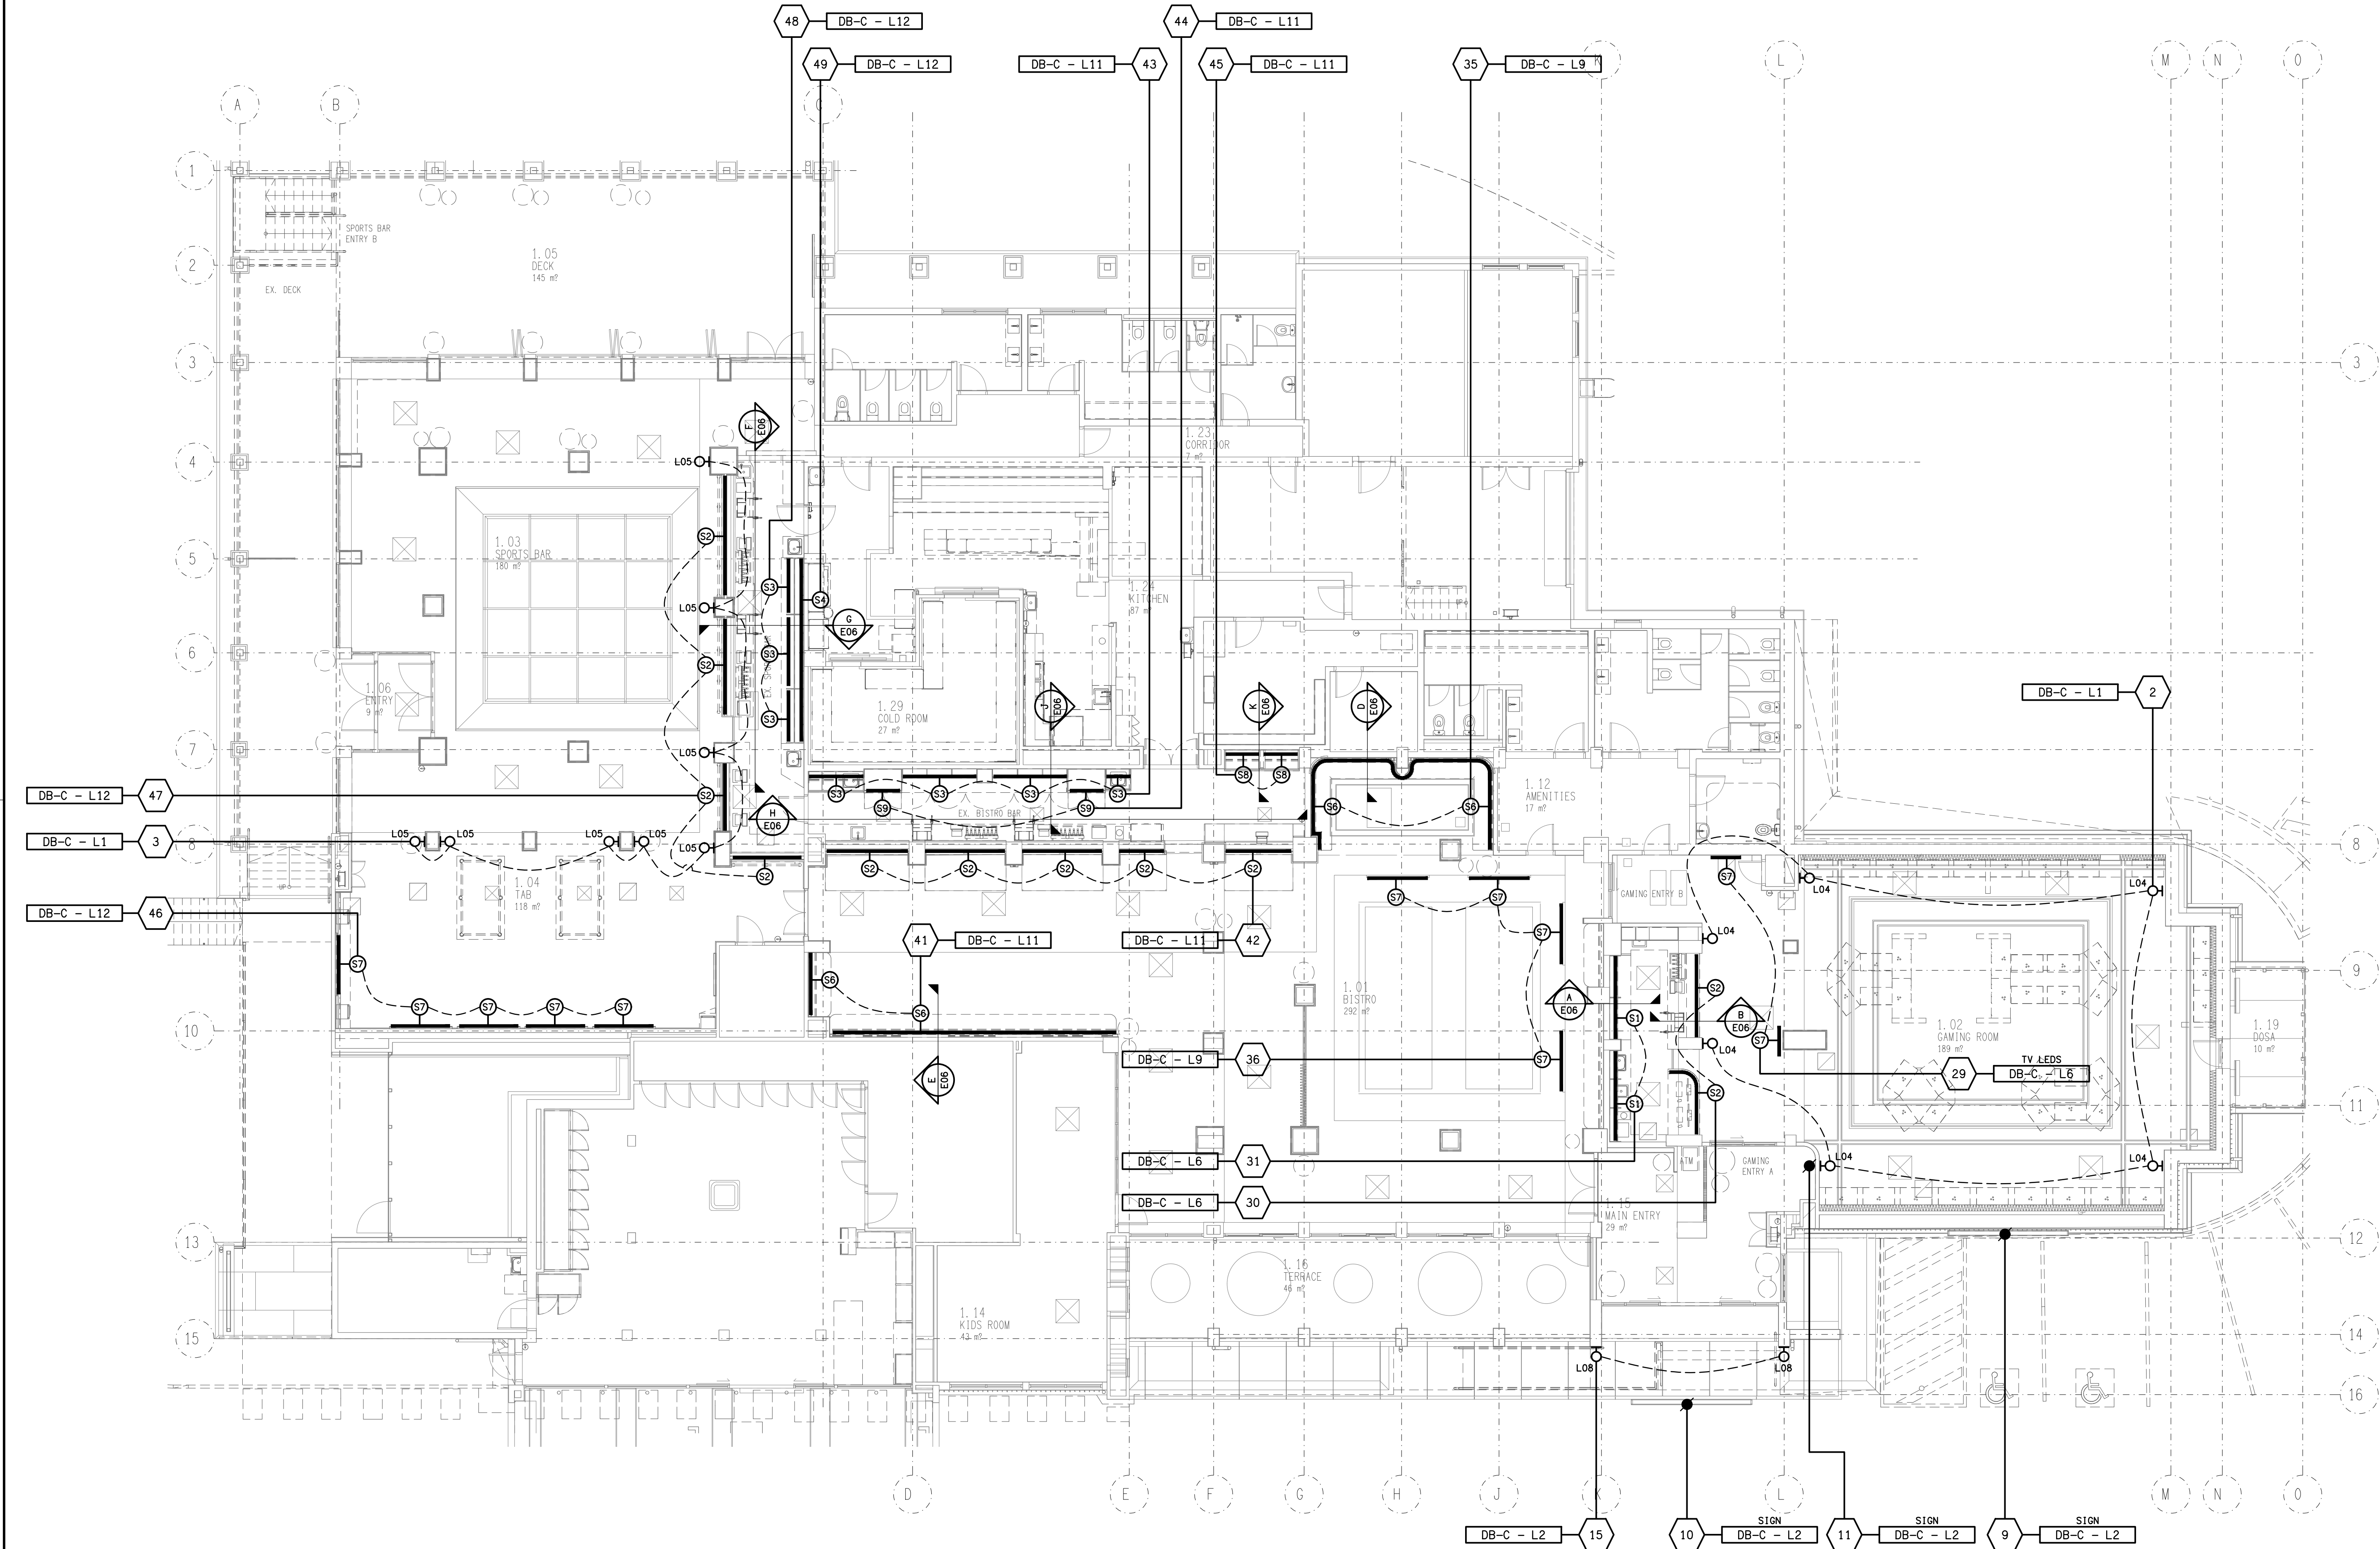


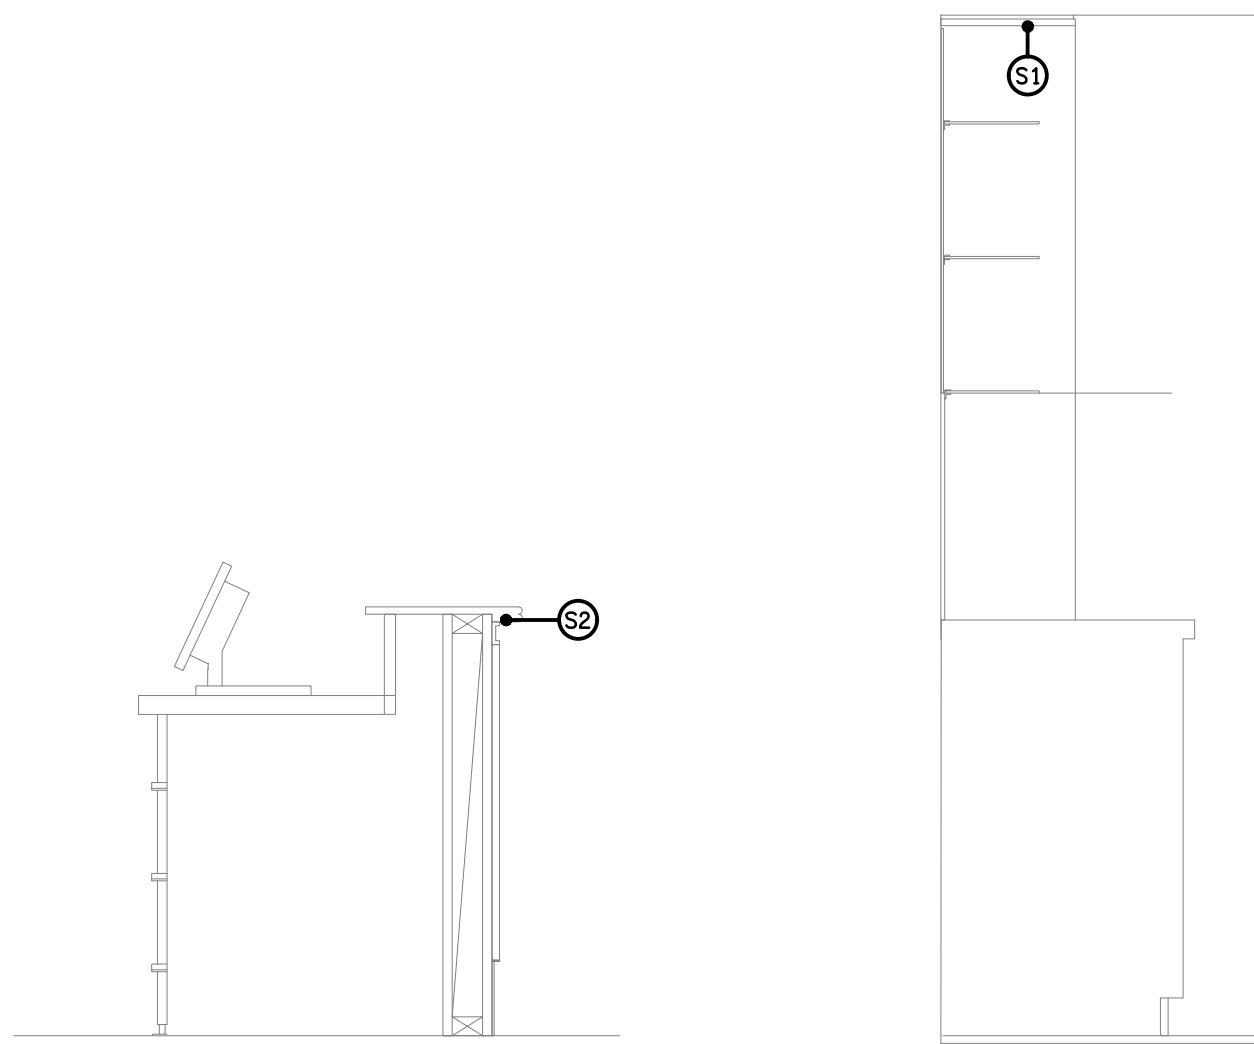


DETAIL A
GAMING COUNTER S2 STRIP LIGHT
SCALE 1: 20

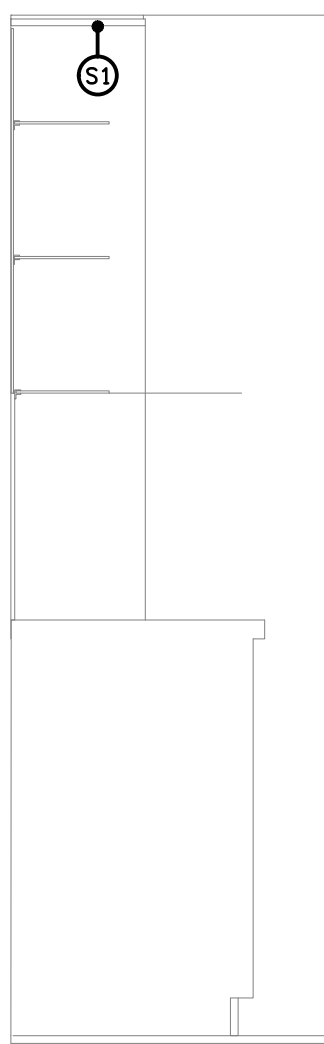


DETAIL B
GAMING REAR WALL S1 STRIP LIGHT
SCALE 1: 20

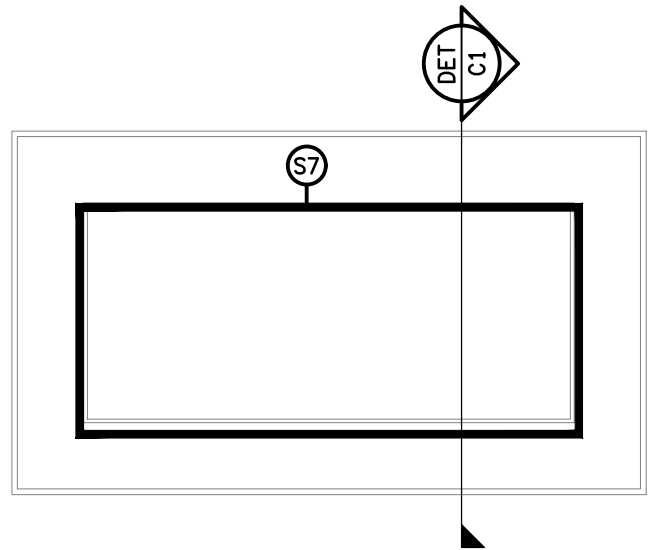


DETAIL C
TYPICAL TV S7 LED STRIP ELEVATION
NOT TO SCALE

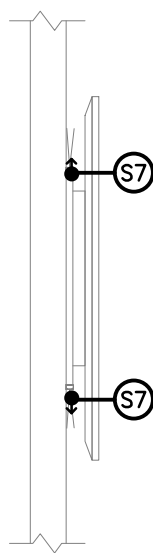


DETAIL C1
TYPICAL TV S7 LED STRIP SECTION
NOT TO SCALE

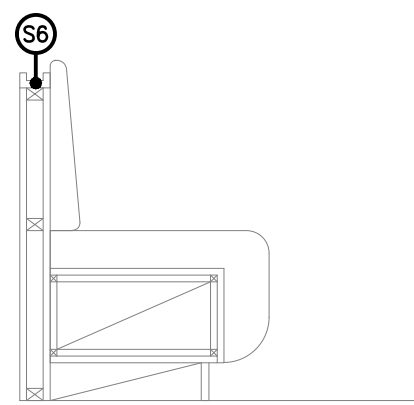


DETAIL D
SEATING S6 LED STRIP SECTION
SCALE 1: 20

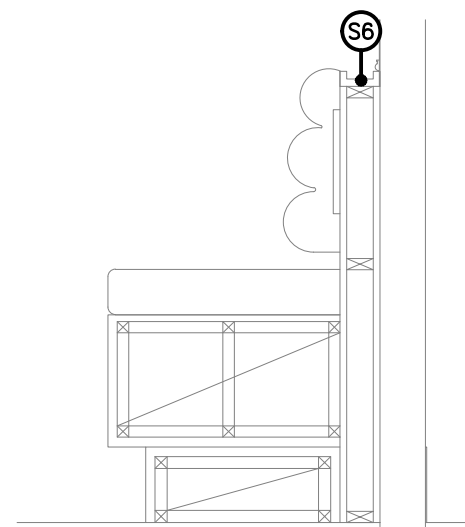


DETAIL E
SEATING S6 LED STRIP SECTION
SCALE 1: 20

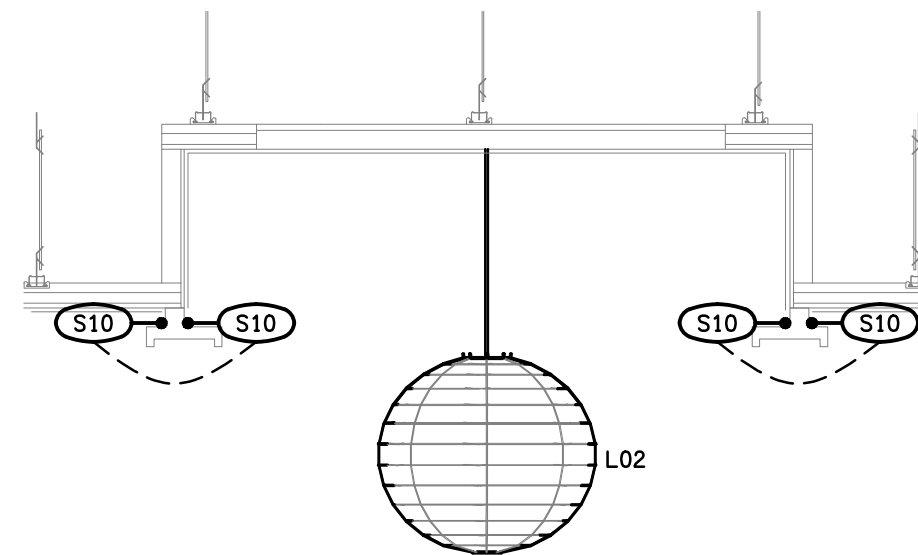


DETAIL L
BISTRO FEATURE LIGHTING SECTION
SCALE 1: 20

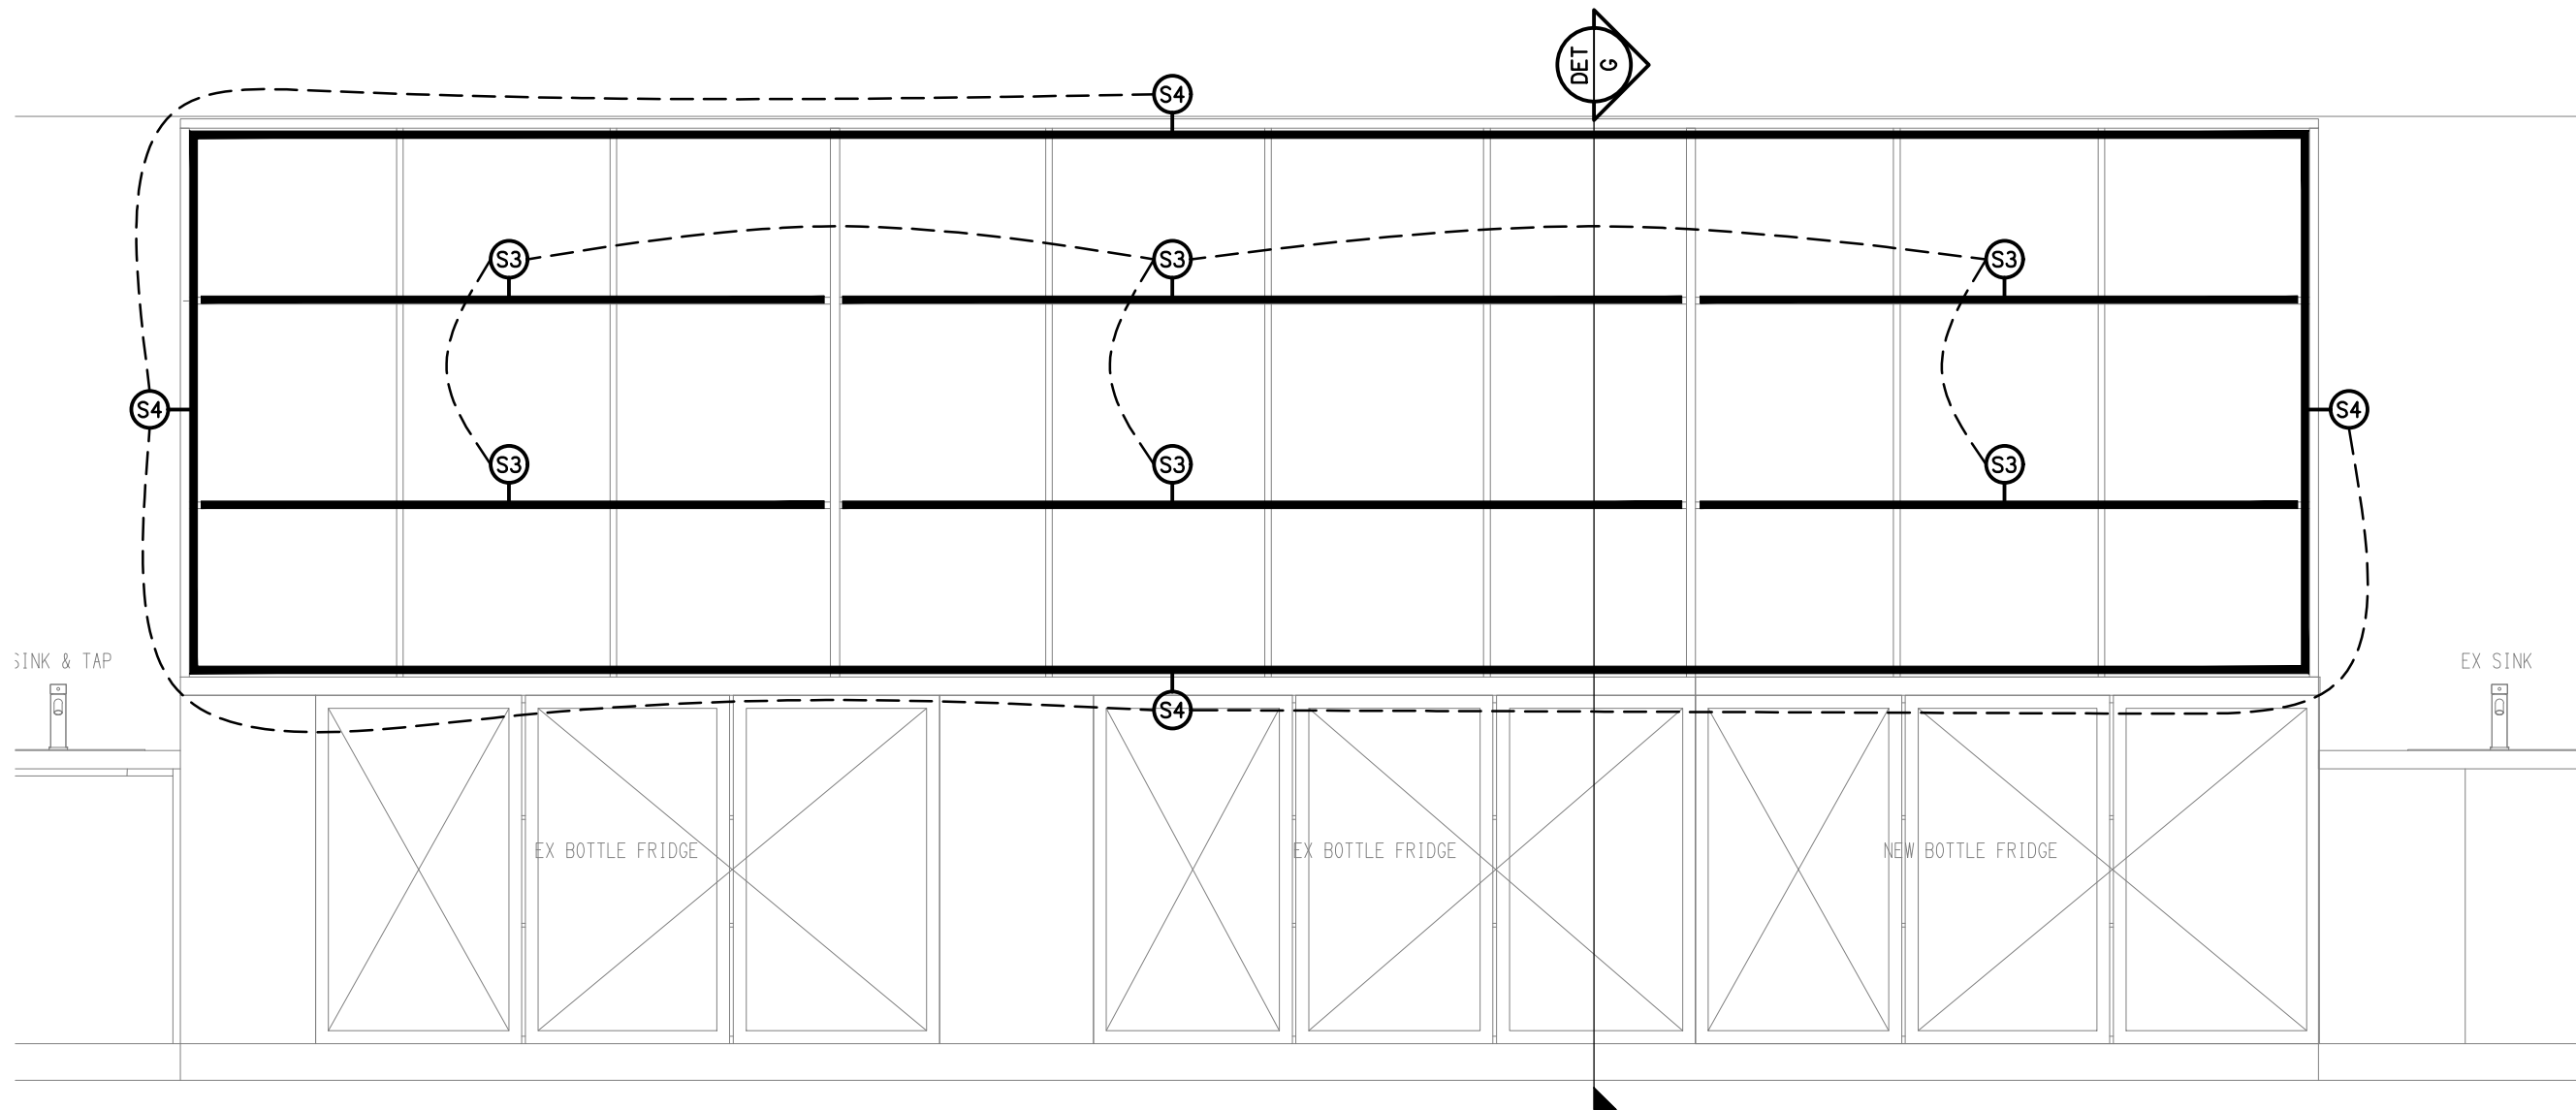


DETAIL F
SPORTS BAR REAR WALL ELEVATION
SCALE 1: 20

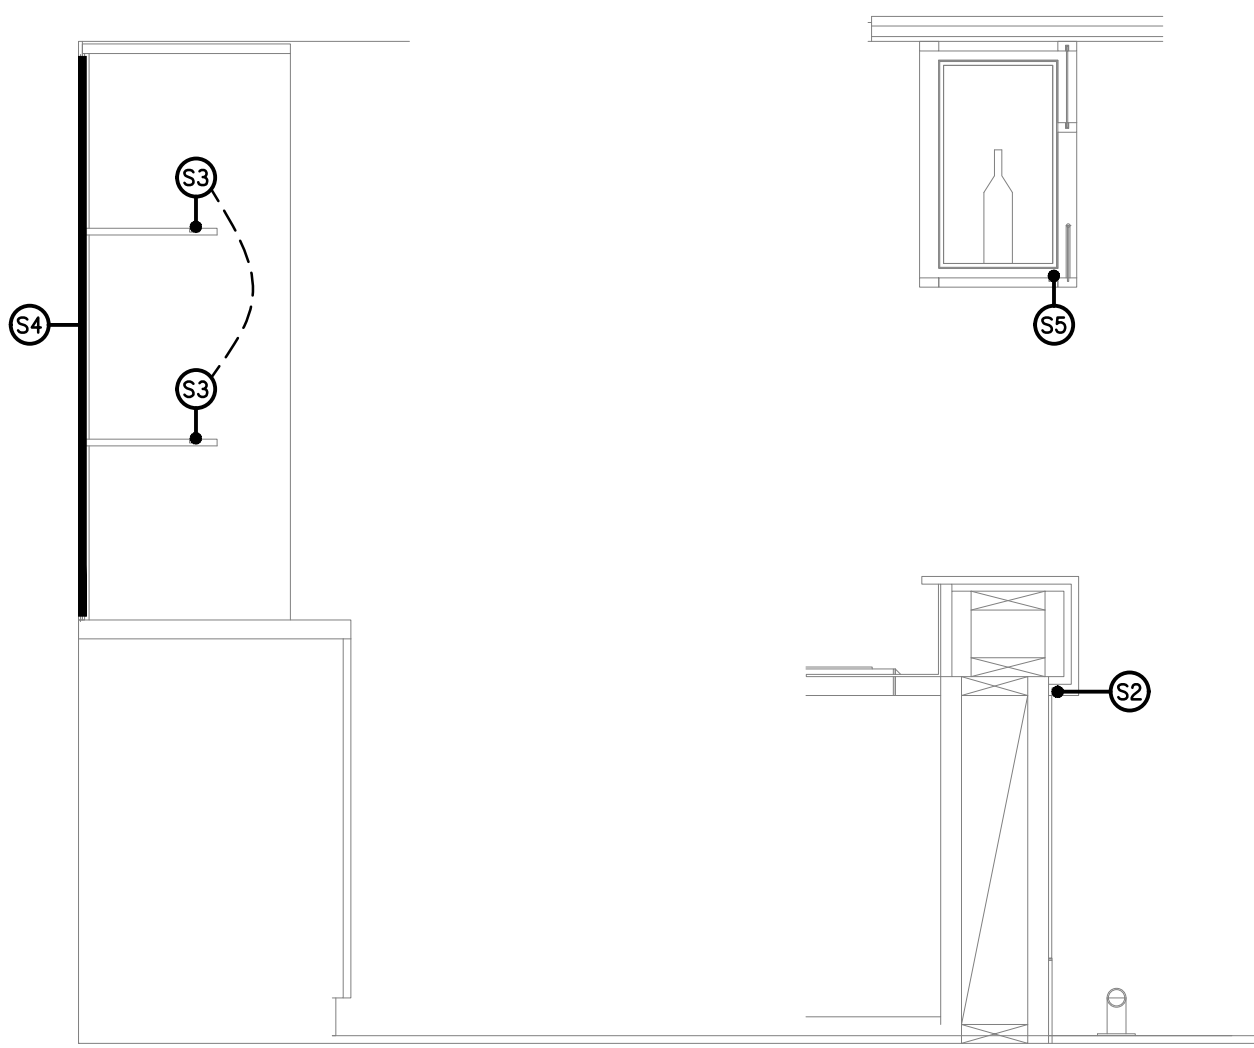


DETAIL G
SPORTS BAR LED STRIP SECTION
SCALE 1: 20

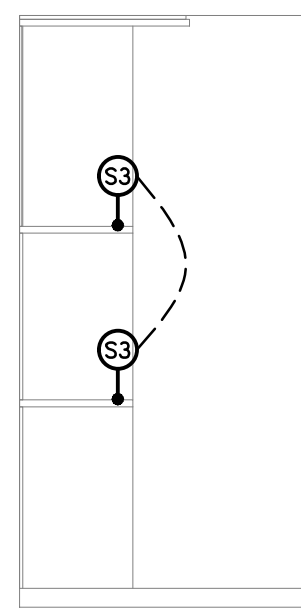

DETAIL J
BISTRO REAR WALL SECTION
SCALE 1: 20

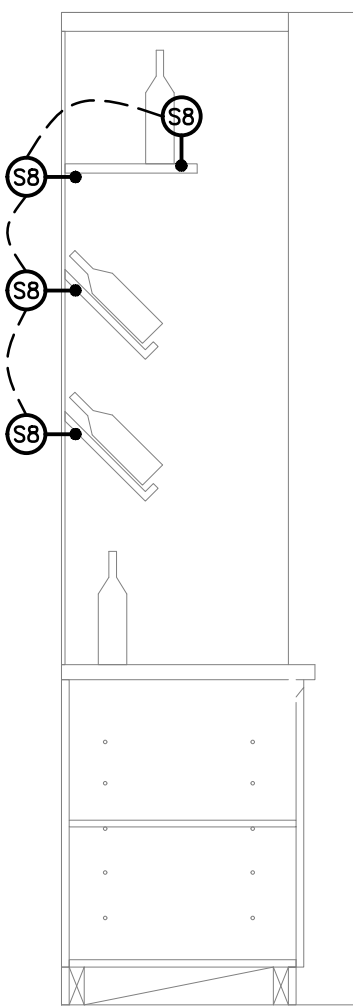

DETAIL K
BISTRO DISPLAY SHELVES SECTION
SCALE 1: 20

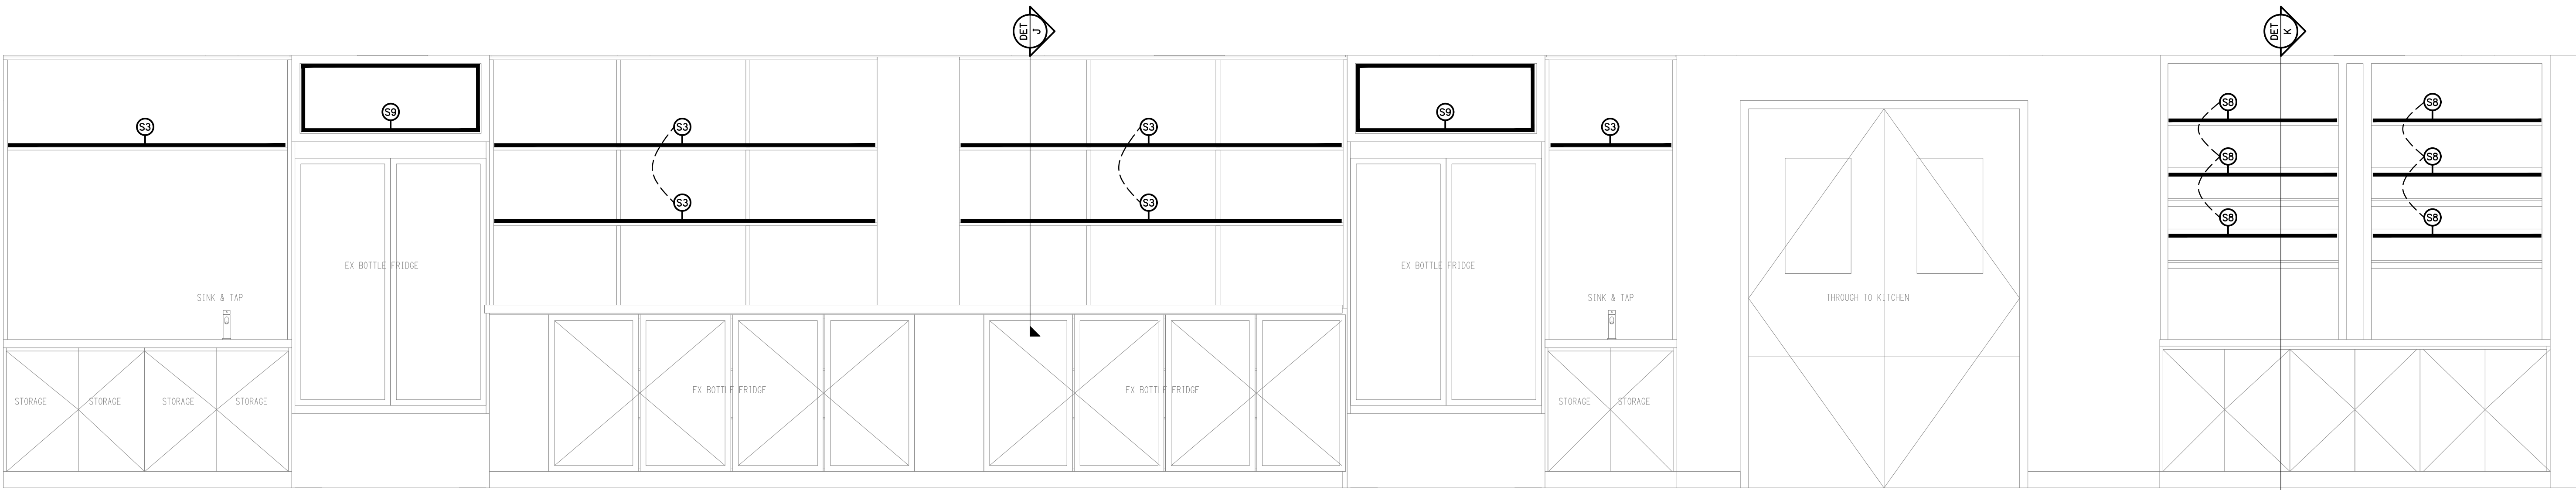

DETAIL H
BISTRO BACK BAR ELEVATION
SCALE 1: 20