

1340

1341

1342

ALTUS



OVERALL VIEW

SPECIFICATIONS:



3.3 kg



3K and 4K



5K



Class I



IK10



IP65



CE

5
Year warranty

Made in Australia

CONSTRUCTION & DESIGN

- LED exterior adjustable floodlight
- Constructed in pressure die cast and extruded aluminium alloy and finished in durable polyester powder-coat paint
- Secure tilt adjustable mechanism for reliable and accurate alignment
- Tempered glass cover
- Stainless steel exposed fasteners

OPTICAL & THERMAL PERFORMANCE

- Unique square double batwing light output
- LED thermal management system incorporates both conduction and natural convection to transfer heat rapidly away from LED source
- Efficient optical control with no harsh cut off and ultra low glare

ELECTRICAL SYSTEM

- Supplied standard with an integral non-dimmable driver and 200mm input cable (refer to dimming options table)
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

TECHNICAL PERFORMANCE

- 28W, 45W or 60W total system power consumption with overload and short circuit protection
- >150,000+ hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (macAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with low colour shift over time
- CRI 90+ is available upon request

CODE ORDERING GUIDE:

PRODUCT CODE


/

DIM CODE

-


COLOUR CODE

Example: 1340-3K-28W-03 or 1340-3K-28W/DALI-03

SYSTEM POWER	COLOUR TEMP.	 65x65° BEAM ANGLE	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT
		PRODUCT CODE		65x65°
28W	3K	1340-3K-28W	3667	3274
	4K	1340-4K-28W	3805	3396
	5K	1340-5K-28W	3447	3077
45W	3K	1341-3K-45W	5289	4976
	4K	1341-4K-45W	5493	5162
	5K	1341-5K-45W	4971	4678
60W	3K	1342-3K-60W	7246	6673
	4K	1342-4K-60W	7952	7325
	5K	1342-5K-60W	7108	6540

DIM CODE	OPTIONS	28W	45W	60W
/DALI	Dali Dimming / Switch Dim	✓	✓	x
/DSI	Digital Dimming	x	x	x
/AD	Analogue Dimming 1-10V	x	x	x
/DIM	Leading & Trailing edge	Std	x	x
	Non-dimmable	x	Std	Std

COLOUR CODE		
-03		Textured White
-07		Textured Black
-11		Textured Silver

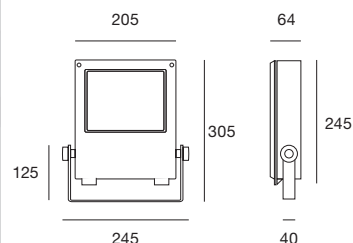

SECURE TILT ADJUSTABLE MECHANISM FOR RELIABLE AND ACCURATE ALIGNMENT

