



ILLI (LX-IL)

TYPE: LX-IL-

KEY FEATURES


- High-performance lumen output
- UGR<19
- Highly effective noise absorption
- 2 sizes and a wide range of colors
- Remote Driver only
- 9' / 2740mm length of black woven power cable per fixture
- IES photometric files available
- Some assembly required

OPTIONAL EXTRAS


- Additional options available upon request:
- E26/E27
 - White canopy and power cord

SIZE, OUTPUT AND WEIGHT


LANDSCAPE (L)

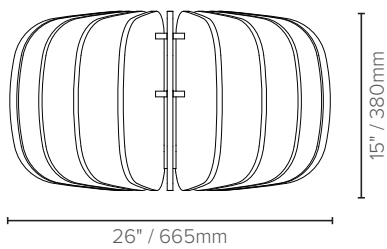

PORTRAIT(P)



LUMINOUS INTENSITY DISTRIBUTION

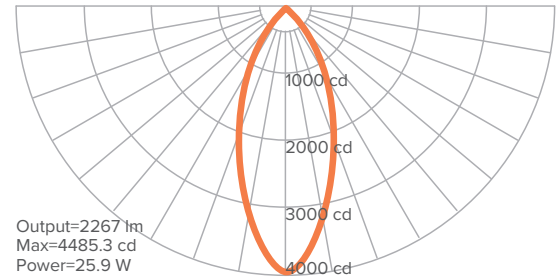

LANDSCAPE AND PORTRAIT	
Delivered Lumen Output	2267 lm
Wattage	25.9 W
Efficacy	87.5 lm/W
CRI	90+
UGR	<19
Beam Angle	45°
CCT	3000/3500/4000 K
Weight	11lbs / 5Kg

ORDER CODE

EXAMPLE: LX - IL - L - R - 40 - UNV

(Luxxbox illi, Landscape (26" x 15" / 665mm x 380mm), Red, 4000K, Universal 110-277V / 0-10V 10% dimming (North America only))


LX - IL							
PRODUCT CODE	SIZE		SHADE COLOR	COLOR TEMP		REGION / DIMMING	
IL	L	LANDSCAPE (26" x 15" / 665mm x 380mm)	Use color codes as shown	30	3000K	UNV	Universal 110 - 277V / 0-10V
	P	PORTRAIT (19" x 23" / 488mm x 578mm)		35	3500K		10% Dimming (North America only)
				40	4000K		Global 220-240V 1% dimming DSI/DALI

Please note this fixture has a Remote Driver and doesn't allow for On-Board or Canopy Concealed Driver options

AVAILABLE COLORS

Colors are subject to lead times and variations across batches

CORE



DESIGNER



Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. July 2024. LX-IL-Spec-Sheet v4.2



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM
LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM
WWW.LUXXBOX.COM



luxx
box



ILLI (LX-IL)

TYPE: LX-IL-


PHOTOMETRICS

LIGHT SOURCE SPECIFICATIONS

	LANDSCAPE AND PORTRAIT
Delivered Lumen Output	2267 lm
Wattage	25.9 W
Efficacy	87.5 lm/W
CRI	90+
UGR	<19
Beam Angle	45°
CCT	3000/3500/4000 K

LUMINOUS INTENSITY DISTRIBUTION

PORTRAIT / LANDSCAPE

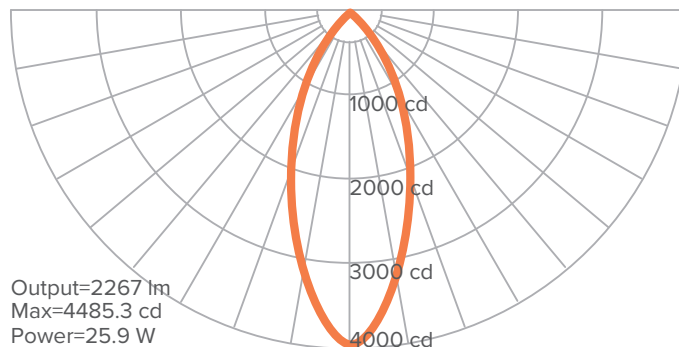



DRIVER INFORMATION

REGION/DIMMING	SIZE	WATTAGE (W)	MAX VOLTAGE (V)	COMPLIANCE
UNIVERSAL (UNV) 0-10V - 10% dimming 110 - 277VAC <i>(North America only)</i>	PORTRAIT	28.5 W	28-42VDC	
	LANDSCAPE			
GLOBAL (G) 0-10V - 1% dimming 220 - 240VAC DSI DALI	PORTRAIT	28.5 W	28-42VDC	
	LANDSCAPE			

CANOPY INFORMATION

Please note power cord and canopy will always be supplied in black unless specified otherwise.

	UNV (North America)	G
PORTRAIT	SA4	SB4
LANDSCAPE	SA4	SB4



Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. July 2024. LX-IL-Spec-Sheet v4.2

luxx
box

LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM
 LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM
 WWW.LUXXBOX.COM

GOING
ZERO





ILLI (LX-IL)

TYPE: LX-IL-

MATERIAL SPECIFICATIONS

COLOR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	AS 1530.3 / ISO 9705: Group 1 / GB8624 B1 / ASTM E-84-14 (Class A, FSI:20 - SDI:450) / BS EN13501-1:2007+A1:2009 (B-s1, d0)
ENVIRONMENTAL:	PET achieves GreenTag Certification / GreenRate: Level A
THERMAL TRANSITION:	ASTM C518-2010. R- Value = 0.30 m ² K/W
SOUND ABSORPTION:	AS ISO 354 – 2006 / Noise reduction coefficient (NRC) = 0.85
VOC EMISSIONS:	ASTM D5116 Rate: < 0.01 mg/m ² /hr (7 days)

Please note some of these certificates will apply to specific colors.


PRODUCT ACOUSTIC PROPERTIES

Testing and post analysis procedures were carried out in accordance with the references detailed below:

AS ISO 354-2006 (R2016)	Acoustics—Measurement of sound absorption in a reverberation room
AS ISO 11654—2002	Rating of sound absorption—Materials and systems
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests
ISO 20189	Screens, furniture and single objects intended for interior use – Rating of sound absorption and sound reduction of elements based on laboratory measurements.


IMPERIAL SABINS

Frequency (Hz)	Sound Absorption Coefficient	PORTRAIT (P)	LANDSCAPE (L)
125	0.06	1.03	1.06
250	0.33	5.68	5.85
500	0.73	12.55	12.93
1000	1	17.20	17.72
2000	0.96	16.51	17.01
4000	1	17.20	17.72

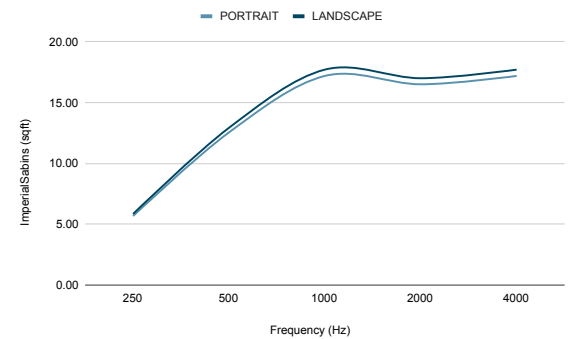

METRIC SABINS

Frequency (Hz)	Sound Absorption Coefficient	PORTRAIT (P)	LANDSCAPE (L)
125	0.06	0.10	0.10
250	0.33	0.53	0.54
500	0.73	1.17	1.20
1000	1	1.60	1.65
2000	0.96	1.53	1.58
4000	1	1.60	1.65

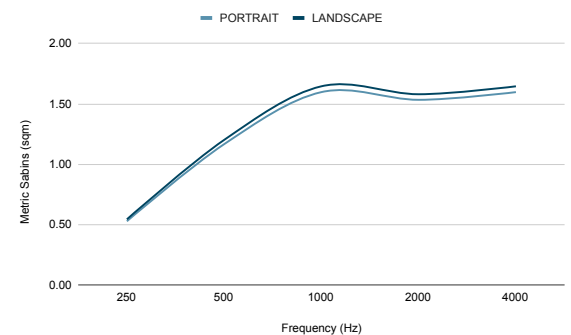

The Sabin data shown above is in accordance with the latest International Standards for the rating of sound absorption and reduction. This is different from the classic methodology, which includes the calculation of the Noise Reduction Coefficient (NRC), the Sound Absorption Average (SAA), the Weighted Sound Absorption Coefficient (**aw**) and the Sound Absorption Class (SAC). However, to make it easier to compare against other products, we are including that information on the table on the right, which was calculated using the Horizontal Floor Area method. Fully detailed test reports are available upon request.

NRC	0.75
SAA	0.75
aw	0.6
SAC	D

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. July 2024. LX-IL-Spec-Sheet v4.2



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM
LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM
WWW.LUXBOX.COM







PRODUCT DIMENSIONS

Please note the dimensions shown below refer to the assembled product. This pendant will be shipped flat pack and requires assembly. For more information, download the Assembly and Installation Instructions document from the product's page at www.luxxbox.com


LANDSCAPE (L)

PORTRAIT(P)


BOTTOM

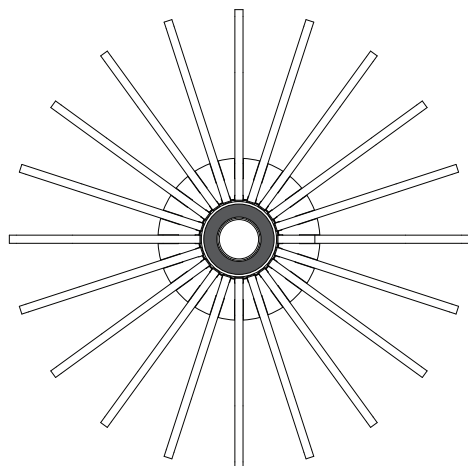

FRONT

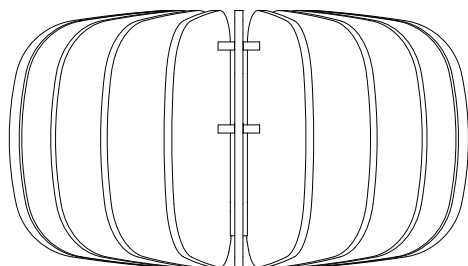


15" / 380mm

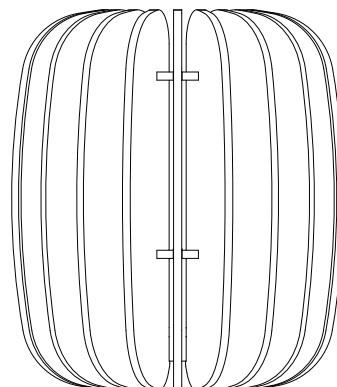


23" / 578mm

TOP

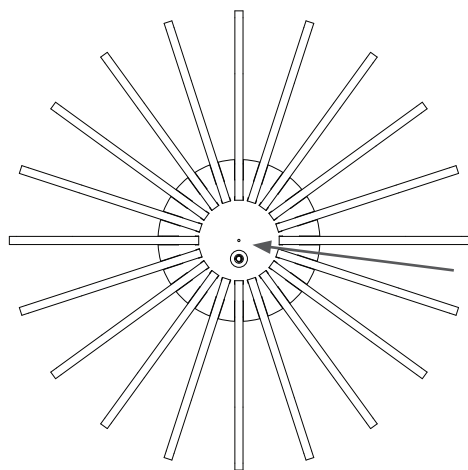

Suspension
(centered with pendant
and canopy)

Ø26" / Ø665mm

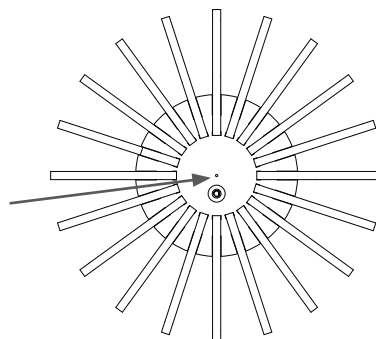

Ø19" / Ø488mm

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. July 2024. LX-IL-Spec-Sheet v4.2