
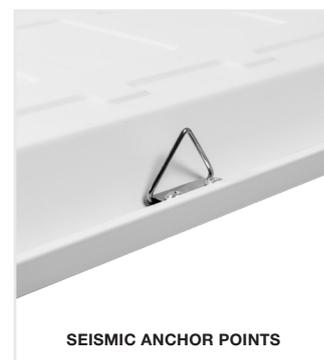


1549

AXIS G3

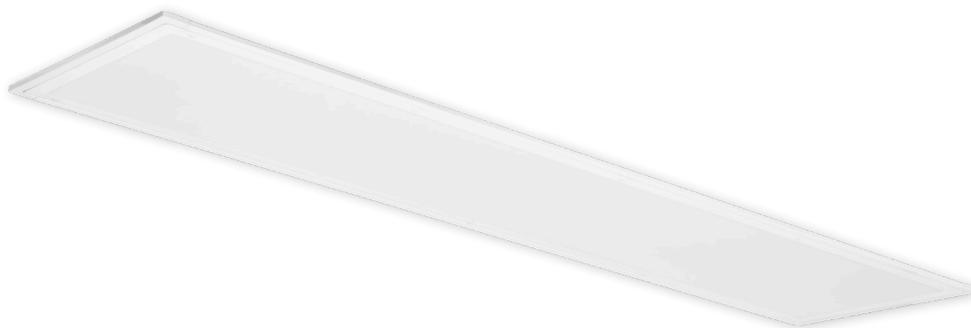

SEISMIC ANCHOR POINTS

SPECIFICATIONS:

2.2 kg	82+ 4K	SELV	IP54	CE	Available	5 Year warranty
--------	-----------	------	------	----	-----------	--------------------

CONSTRUCTION & DESIGN

- Backlit LED luminaire for T-Bar suspended ceilings
- Optional recessing frame for plaster board ceilings, or surface mount kit
- Seismic anchor points provided
- Constructed in pressed steel with aluminium frame and finished in durable polyester powder coat paint
- Dual stage optics provide a smooth diffused light output in a low profile body

OPTICAL & THERMAL PERFORMANCE

- LED system consists of high efficiency LED modules thermally integrated to the housing and primary optics on board
- Wide light distribution with outstanding efficacy
- Complies thermally with IC-4 and IC-F classification in accordance with AS/NZS 60598

ELECTRICAL SYSTEM

- Supplied standard with a remote non-dimmable driver (refer dimming options table)
- All drivers come with a quick-connect harness, power cord and plug
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

TECHNICAL PERFORMANCE

- 26W, 34W or 40W total system power consumption with overload and short circuit protection
- Chromaticity tolerance (MacAdam step) - 2
- Lifetime: at 25°C ambient at 50°C ambient


L70B10 175,000hrs	L70B10 135,000hrs
L80B10 110,000hrs	L80B10 85,000hrs
L90B10 52,000hrs	L90B10 40,000hrs
- Greenstar compliant, flicker free

CODE ORDERING GUIDE:

PRODUCT CODE / DIM CODE - COLOUR CODE

Example: 1549-4K-26W-01 or 1549-4K-26W/DALI-01

SYSTEM POWER	COLOUR TEMP.	114° BEAM ANGLE	EFFICACY	LUMINAIRE LUMEN OUTPUT
		PRODUCT CODE		114°
26W	4K	1549-4K-26W	134 LM/W	3466
34W		1549-4K-34W	126 LM/W	4408
40W		1549-4K-40W	123 LM/W	5046

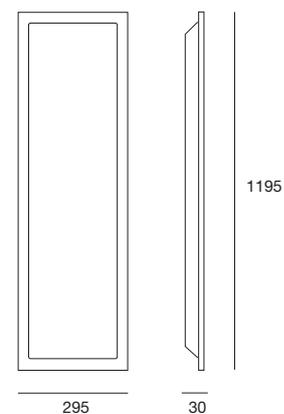

DIM CODE	OPTIONS	26W	34W	40W
/DALI	Dali Dimming / Switch Dim	✓	✓	✓
/DSI	Digital Dimming	✓	✓	✓
/AD	Analogue Dimming 1-10V	x	x	x
/DIM	Leading & Trailing edge	✓	x	✓
	Non-dimmable	Std	Std	Std

COLOUR CODE	COLOUR
-01	Satin White

MODEL OPTIONS: ADDITIONAL OPTIONS AVAILABLE TO BE PURCHASED SEPARATELY

- 246** SURFACE MOUNT KIT (size 1206 x 306)
- PF-1230** RECESSED CEILING FRAME KIT (size 1225 x 325) 1210 x 310



246 WILL BE DISCONTINUED AND REPLACED BY 252 SCREWLESS S.M. KIT (size 1200 x 300)