


1550

AXIS G3

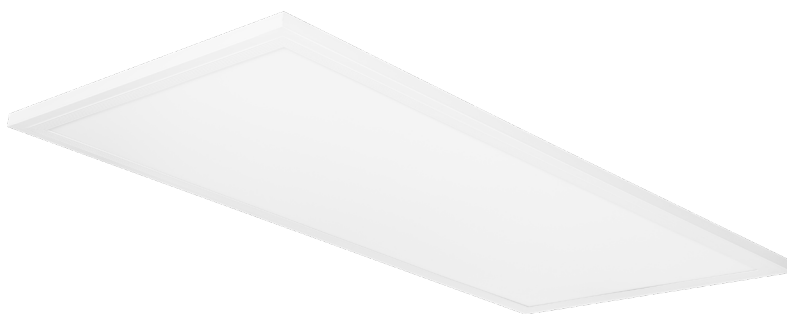

SEISMIC ANCHOR POINTS

SPECIFICATIONS:

| | | | | | | |
|--------|-----------|------|------|--|-----------|-----------------|
| 1.0 kg | 82+ 4K | SELV | IP54 | | Available | 5 Year warranty |
|--------|-----------|------|------|--|-----------|-----------------|

CONSTRUCTION & DESIGN

- Backlit LED luminaire for T-Bar suspended ceilings
- Optional recessing frame for plaster board ceilings, or surface mount kit
- Seismic anchor points provided
- Constructed in pressed steel with aluminium frame and finished in durable polyester powder coat paint
- Dual stage optics provide a smooth diffused light output in a low profile body

OPTICAL & THERMAL PERFORMANCE

- LED system consists of high efficiency LED modules thermally integrated to the housing and primary optics on board
- Wide light distribution with outstanding efficacy
- Complies thermally with IC-4 and IC-F classification in accordance with AS/NZS 60598

ELECTRICAL SYSTEM

- Supplied standard with a remote non-dimmable driver (refer dimming options table)
- All drivers come with a quick-connect harness, power cord and plug
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

TECHNICAL PERFORMANCE

- 14W or 22W total system power consumption with overload and short circuit protection
- Chromaticity tolerance (MacAdam step) - 2
- Lifetime: at 25°C ambient at 50°C ambient

| | |
|-------------------|-------------------|
| L70B10 175,000hrs | L70B10 135,000hrs |
| L80B10 110,000hrs | L80B10 85,000hrs |
| L90B10 52,000hrs | L90B10 40,000hrs |
- Greenstar compliant, flicker free

CODE ORDERING GUIDE:


PRODUCT CODE / DIM CODE - COLOUR CODE

Example: 1550-4K-22W-01 or 1550-4K-22W/DALI-01

| SYSTEM POWER | COLOUR TEMP. | 114° BEAM ANGLE | EFFICACY | LUMINAIRE LUMEN OUTPUT |
|--------------|--------------|-----------------|----------|------------------------|
| | | PRODUCT CODE | | 114° |
| 14W | 4K | 1550-4K-14W | 124 LM/W | 1625 |
| 22W | | 1550-4K-22W | 119 LM/W | 2656 |

| DIM CODE | OPTIONS | 14W | 22W |
|----------|---------------------------|-----|-----|
| /DALI | Dali Dimming / Switch Dim | ✓ | ✓ |
| /DSI | Digital Dimming | ✓ | ✓ |
| /AD | Analogue Dimming 1-10V | x | x |
| /DIM | Leading & Trailing edge | x | x |
| | Non-dimmable | Std | Std |

| COLOUR CODE | |
|-------------|-------------|
| -01 | Satin White |



MODEL OPTIONS: ADDITIONAL OPTIONS AVAILABLE

TO BE PURCHASED SEPARATELY

247 SURFACE MOUNT KIT
(size 600 x 300)

PF-6030 RECESSED CEILING FRAME KIT
(size 625 x 325) 610 x 310

247 WILL BE DISCONTINUED AND REPLACED BY
253 SCREWLWSS S.M. KIT (size 600 x 300)