


1548

# AXIS G3

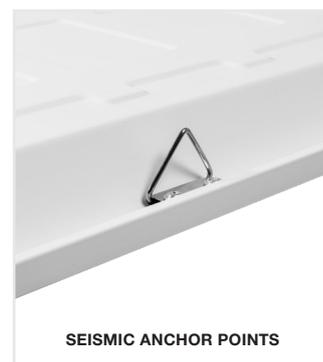

SEISMIC ANCHOR POINTS

**SPECIFICATIONS:**

1.7 kg	82+ 4K	SELV	IP54	CE	Available	5 Year warranty
--------	-----------	------	------	----	-----------	--------------------

**CONSTRUCTION & DESIGN**

- Backlit LED luminaire for T-Bar suspended ceilings
- Optional recessing frame for plaster board ceilings, or surface mount kit
- Seismic anchor points provided
- Constructed in pressed steel with aluminium frame and finished in durable polyester powder coat paint
- Dual stage optics provide a smooth diffused light output in a low profile body

**OPTICAL & THERMAL PERFORMANCE**

- LED system consists of high efficiency LED modules thermally integrated to the housing and primary optics on board
- Wide light distribution with outstanding efficacy
- Complies thermally with IC-4 and IC-F classification in accordance with AS/NZS 60598

**ELECTRICAL SYSTEM**

- Supplied standard with a remote non-dimmable driver (refer dimming options table)
- All drivers come with a quick-connect harness, power cord and plug
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

**TECHNICAL PERFORMANCE**


- 26W, 34W or 40W total system power consumption with overload and short circuit protection
- Chromaticity tolerance (MacAdam step) - 2
- Lifetime: at 25°C ambient at 50°C ambient
 

L70B10 175,000hrs	L70B10 135,000hrs
L80B10 110,000hrs	L80B10 85,000hrs
L90B10 52,000hrs	L90B10 40,000hrs
- Greenstar compliant, flicker free

**CODE ORDERING GUIDE:**

PRODUCT CODE / DIM CODE - COLOUR CODE  
 Example: 1548-4K-26W-01 or 1548-4K-26W/DALI-01

SYSTEM POWER	COLOUR TEMP.	114° BEAM ANGLE	EFFICACY	LUMINAIRE LUMEN OUTPUT
		PRODUCT CODE		114°
26W	4K	1548-4K-26W	129 LM/W	3339
34W		1548-4K-34W	126 LM/W	4219
40W		1548-4K-40W	123 LM/W	4833



DIM CODE	OPTIONS	26W	34W	40W
/DALI	Dali Dimming / Switch Dim	✓	✓	✓
/DSI	Digital Dimming	✓	✓	✓
/AD	Analogue Dimming 1-10V	x	x	x
/DIM	Leading & Trailing edge	✓	x	✓
	Non-dimmable	Std	Std	Std

COLOUR CODE	
-01	Satin White

**MODEL OPTIONS: ADDITIONAL OPTIONS AVAILABLE TO BE PURCHASED SEPARATELY**

**245** SURFACE MOUNT KIT (size 600 x 600)

**PF-6060** RECESSED CEILING FRAME KIT (size 625 x 625) 610 x 610



**245** WILL BE DISCONTINUED AND REPLACED BY **251** SCREWLESS S.M. KIT (size 600 x 600)