LEGEND

ELECTRICAL SERVICES SWITCHBOARD.

SWITCHBOARD / CONTROL PANEL NOT PROVIDED AS PART OF THE ELECTRICAL SUBCONTRACT.

SINGLE POWER OUTLET.

DOUBLE POWER OUTLET.

GAMING / TAB OUTLET BY GAMING ELECTRICIAN.

SIGNAGE CONNECTION.

SINGLE PHASE ISOLATOR.

THREE PHASE ISOLATOR.

CONDUIT ROUTE.

LED SCREEN AV CONNECTION.

LIGHTING CONTROL SWITCHPANEL, TYPE x.

ONE WAY LIGHT SWITCH.

CIRCUIT LINE.

∠ ✓ SWITCH LINE.

DB-x - Py

POWER CIRCUIT DESIGNATION. DENOTES DB AND CIRCUIT.

LIGHTING CONTROL CHANNEL REFERENCE.

ELECTRICAL EQUIPMENT AS NOTED.



REFER TO DETAIL NOTED FOR THE AREA SHOWN HATCHED. ADDITIONAL OUTLETS & FITTINGS MAY BE SHOWN ON DETAIL.



F1: EXISTING CEILING FAN.



Sx: LED JOINERY / CEILING STRIP LIGHT, TYPE AS NOTED.

E1: GENERAL CEILING RECESSED LED EMERGENCY LIGHT, WHITE.

EX: EMERGENCY LED EXIT LIGHT, BLACK.

LT1: SURFACE TRACK C/W LIGHT FITTINGS AS NOTED.

L1A: SMALL DECORATIVE SUSPENDED PENDANT.

L1B: MEDIUM DECORATIVE SUSPENDED PENDANT.

L1C: LARGE DECORATIVE SUSPENDED PENDANT.

L2: DECORATIVE WALL LIGHT.

L3: DECORATIVE SUSPENDED PENDANT.

L4: DECORATIVE WALL LIGHT.

L5A: DECORATIVE SUSPENDED PENDANT.

L5B: DECORATIVE SUSPENDED PENDANT.

L6: DECORATIVE EXTERNAL WALL LIGHT.

L7: DECORATIVE SPORTS BAR WALL LIGHT.

L8: DECORATIVE AMENITY WALL LIGHT.

L9: RECESSED DOWNLIGHT.

L10 O L10: RECESSED DOWNLIGHT.

L11 O L11: RECESSED DOWNLIGHT.

L12 O L12: RECESSED DOWNLIGHT.

L13 O L13: RECESSED DOWNLIGHT.

L14 O L14: RECESSED DOWNLIGHT.

L15 O L15: RECESSED DOWNLIGHT.

LEGEND

L16O L16: RECESSED DOWNLIGHT.

L17O L17: RECESSED DOWNLIGHT.

L18 L18 L18: RECESSED DOWNLIGHT.

L19O L19: CURTAIN RECESSED DOWNLIGHT.

L20: GAMING ROOM RECESSED DOWNLIGHT.

GAMING SCREEN VERTICAL LED STRIP LIGHT.

G1: GAMING BASE KICK LED STRIP LIGHT.

EQUIPMENT:

TEST - TEST PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

RESET - RESET PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

LAMP - AMBER TEST INDICATING LAMP MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.


Ta - ADJUSTABLE 0-3 HOUR TIMED RELAY.

- 15 MINUTE RUN-ON TIMER TO OPERATE UPON THE RETURN OF MAINS POWER.

Cx - CONTACTOR x.

CRx - CONTROL RELAY x.

Rx - RELAY x.

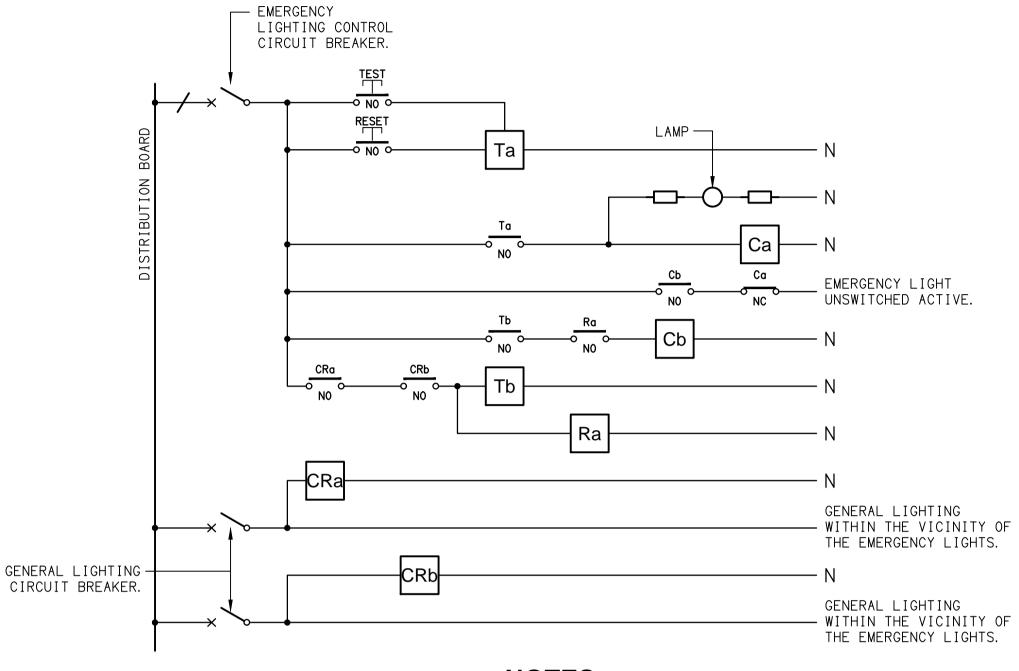


NOTES

SCHEMATIC

EMERGENCY LIGHTING NOT TO SCALE

1. THE EMERGENCY LIGHT UNSWITCHED ACTIVE / GENERAL LIGHTING SWITCHED ACTIVE CIRCUIT ARRANGEMENT AND CONTROL IS TYPICAL FOR ALL CIRCUITS SUPPLYING EMERGENCY LIGHTS.

2. PROVIDE ADDITIONAL CONTROL RELAYS (CRx) CONFIGURED AS PER CRa AND CRb FOR ALL ADDITIONAL LIGHTING CIRCUITS THAT SUPPLY LIGHTS IN THE VICINITY OF THE EMERGENCY LIGHTS.

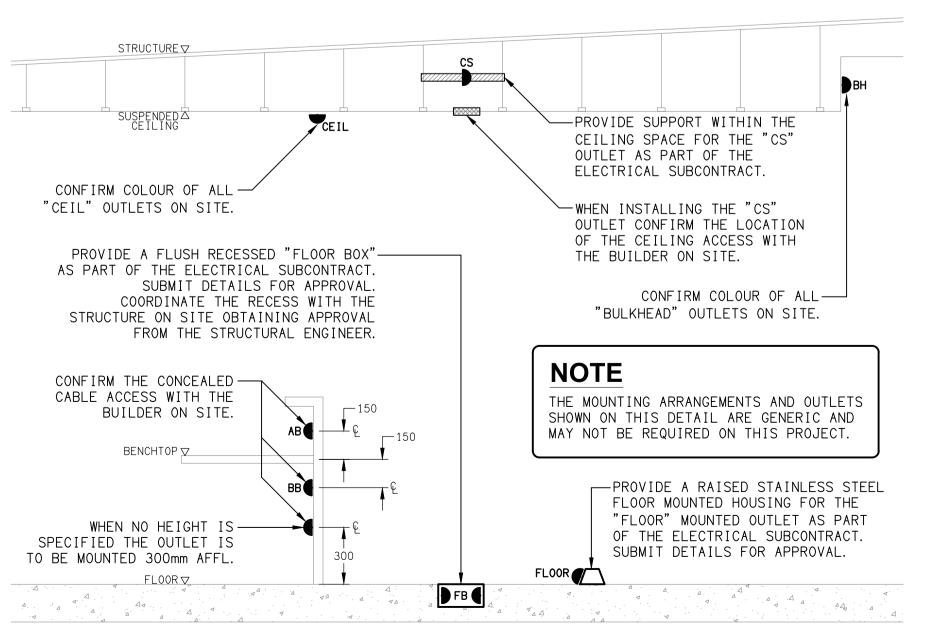

DETAIL TYPICAL OUTLET MOUNTINGS NOT TO SCALE

THE COPYRIGHT OF THIS DRAWING REMAINS THE PROPERTY OF THE ELECTRICAL DESIGN GROUP.

USE FIGURED DIMENSIONS IN PREFERENCE TO SCALE.

ALL DIMENSIONS TO BE VERIFIED ONSITE.

B | TENDER 31/10/2025 REV: DESCRIPTION: DATE:

ELECTRICAL DESIGN GROUP ELECTRICAL BUILDING SERVICES CONSULTANTS

BRISBANE:

P.O. Box 15 Sherwood Qld 4075 Phone: (07) 3278 4375 Email: brisbane@edg.net.au Web: www.edg.net.au

TRADING AS: **ELECTRICAL DESIGN** ACN 092 710 793 GROUP

PROJECT:

CLUB TAVERN CABOOLTURE

SITE ADDRESS:

16 MATTHEW TERRACE, CABOOLTURE

SHEET SIZE:

REVISION:

B

ат **А1**

NOT TO SCALE

DRAWING TITLE:

ELECTRICAL SERVICES LEGEND & DETAILS

DRAWING NO: **E01** C3646a