LEGEND ELECTRICAL SERVICES SWITCHBOARD. SWITCHBOARD / CONTROL PANEL NOT PROVIDED AS PART OF THE ELECTRICAL SUBCONTRACT. SINGLE POWER OUTLET. DOUBLE POWER OUTLET. GAMING / TAB OUTLET BY GAMING ELECTRICIAN. SIGNAGE CONNECTION. SINGLE PHASE ISOLATOR. CONDUIT ROUTE. LIGHTING CONTROL SWITCHPANEL, TYPE x. ONE WAY LIGHT SWITCH. CIRCUIT LINE. ___ SWITCH LINE. POWER CIRCUIT DESIGNATION. DB-x - Py DENOTES DB AND CIRCUIT. LIGHTING CONTROL CHANNEL REFERENCE. ELECTRICAL EQUIPMENT AS NOTED. REFER TO DETAIL NOTED FOR THE AREA SHOWN HATCHED. ADDITIONAL OUTLETS & FITTINGS MAY BE SHOWN ON DETAIL. FIRE INDICATOR PANEL. FIRE ALARM MANUAL CALL POINT. AUTO DOOR FIRE ALARM INTERFACE. EXISTING HEATER TO BE RETAINED. Sx: LED JOINERY / CEILING STRIP LIGHT, TYPE AS NOTED. E1 € E1: GENERAL CEILING RECESSED LED EMERGENCY LIGHT, WHITE. E2: EXISTING EMERGENCY LIGHT TO BE RETAINED. E3 EX: EXISTING EMERGENCY EXIT LIGHT TO BE RETAINED. E4: GENERAL CEILING RECESSED LED EMERGENCY LIGHT, BLACK. EX: EMERGENCY LED EXIT LIGHT. L1: TWO DECORATIVE WALL LIGHTS MOUNTED ONE ABOVE THE OTHER. L2: DECORATIVE SUSPENDED PENDANT. L3: DECORATIVE WALL LIGHT. L4: THREE LAMP DECORATIVE SUSPENDED PENDANT. L5: DECORATIVE UP / DOWN WALL LIGHT. L6: DECORATIVE WALL LIGHT. L7: DECORATIVE PENDANT. L8: RECESSED FEATURE SCREEN UP LIGHT. L9: GARDEN SPIKE LIGHT. L10 O L10: EXISTING LIGHT FITTING TO BE RETAINED.

EQUIPMENT:

TEST - TEST PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

RESET - RESET PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

LAMP - AMBER TEST INDICATING LAMP MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

Ta - ADJUSTABLE 0-3 HOUR TIMED RELAY.

Tb - 15 MINUTE RUN-ON TIMER TO OPERATE UPON THE RETURN OF MAINS POWER.


SCHEMATIC

NOT TO SCALE

EMERGENCY LIGHTING

Cx - CONTACTOR x.


CRx - CONTROL RELAY x.

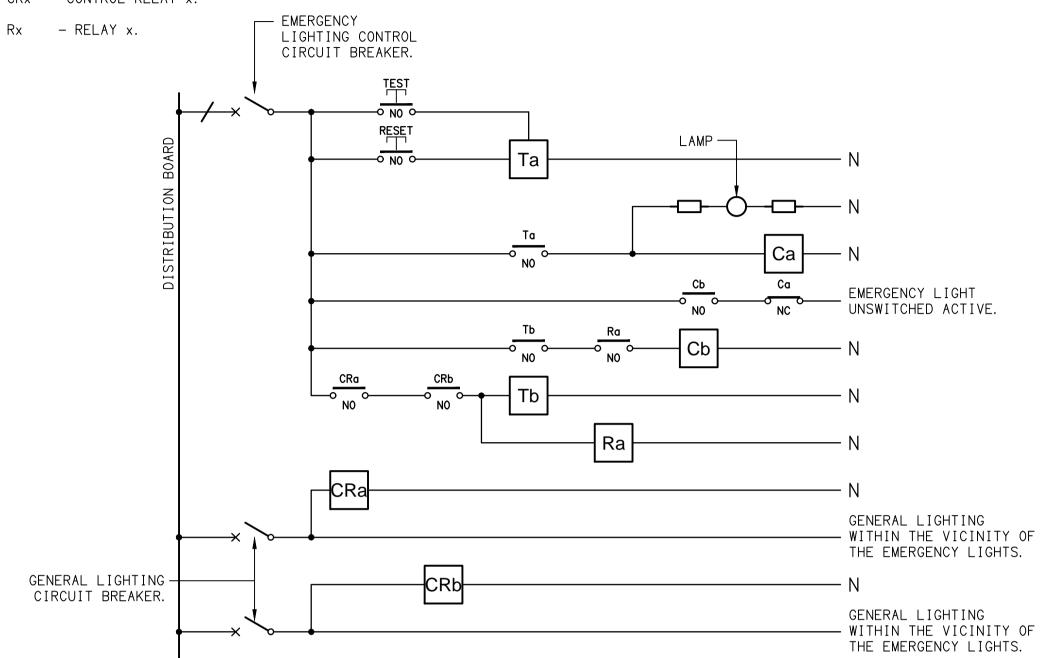

NOTES

1. THE EMERGENCY LIGHT UNSWITCHED ACTIVE / GENERAL LIGHTING SWITCHED ACTIVE CIRCUIT ARRANGEMENT AND CONTROL IS TYPICAL FOR ALL CIRCUITS SUPPLYING EMERGENCY LIGHTS.

2. PROVIDE ADDITIONAL CONTROL RELAYS (CRx) CONFIGURED AS PER CRa AND CRb FOR ALL ADDITIONAL LIGHTING CIRCUITS THAT SUPPLY LIGHTS IN THE VICINITY OF THE EMERGENCY LIGHTS.

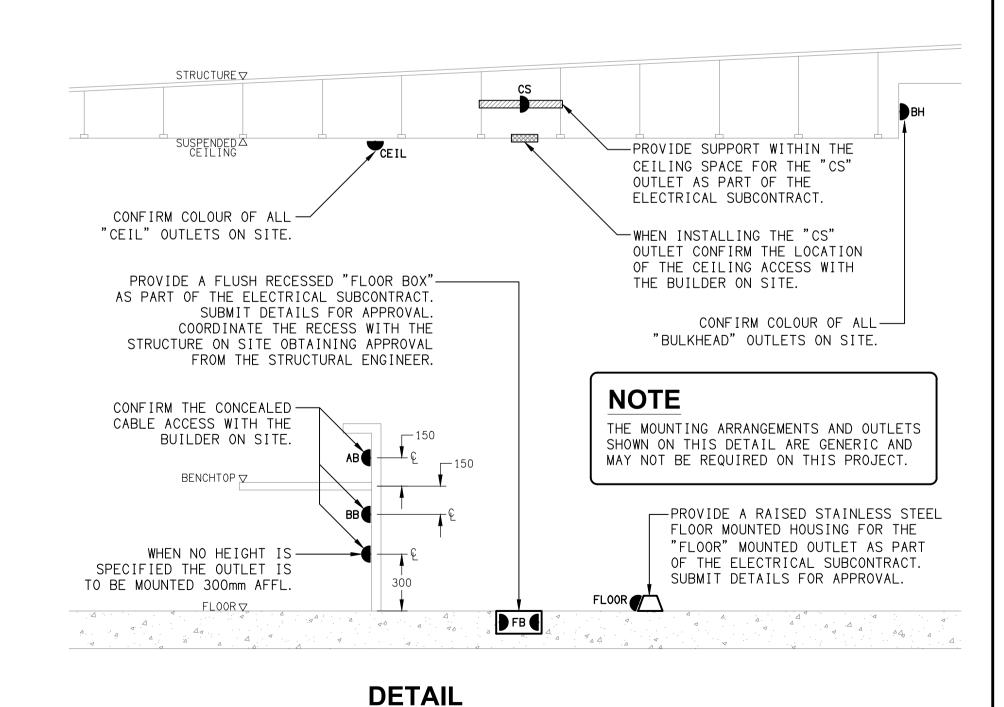

TYPICAL OUTLET MOUNTINGS

NOT TO SCALE

ELECTRICAL DESIGN GROUP

CONSULTANTS GOLD COAST

KALLANGUR TAVERN

1517 ANZAC AVENUE, KALLANGUR

B TENDER 29/10/2025 REV: DESCRIPTION: DATE: **ELECTRICAL SERVICES LEGEND & DETAILS** REVISION: C3648a E01 B NOT TO SCALE AT A1

ALL DIMENSIONS TO BE VERIFIED ONSITE.

THE COPYRIGHT OF THIS DRAWING

REMAINS THE PROPERTY OF THE

ELECTRICAL DESIGN GROUP.

USE FIGURED DIMENSIONS

IN PREFERENCE TO SCALE.

ELECTRICAL DESIGN GROUP BRISBANE

ELECTRICAL DESIGN GROUP

PTY LTD ACN 092 710 793

TRADING AS:

LEGEND

L11Q L11: AMENITY WALL LIGHT.

L12O L12: 1200 LONG SURFACE BATTEN.

L14O L14: RECESSED DOWNLIGHT BLACK.

L15 C L15: RECESSED DOWNLIGHT WHITE.

L16 L16: RECESSED DOWNLIGHT BLACK.

L18O L18: RECESSED DOWNLIGHT WHITE.

L19 L19: AMENITY PENDANT.

B1 O B1: PALM TREE BUD LIGHTS.

L17O L17: RECESSED ADJUSTABLE DOWNLIGHT BLACK.

G1: GAMING BASE KICK LED STRIP LIGHT.

L13O L13: RECESSED DOWNLIGHT TO MATCH THE ADJACENT L10 FITTING.

L20 HO L20: EXTERNAL BEAM MOUNTED ADJUSTABLE SPOT LIGHT STAINLESS STEEL.

ELECTRICAL BUILDING SERVICES BRISBANE

P.O.Box 15, Sherwood Q.4075 Phone: (07) 3278 4375 Email: brisbane@edg.net.au

Web: www.edg.net.au