





STRADBROKE

ARCHITECTURAL PIN HOLE DIMMABLE LED DOWNLIGHT

R1077

- 6w / 9w / 12w / 15w
- 2700k / 3000k / 4000k
- White / Black Trim
- 75mm Cutout

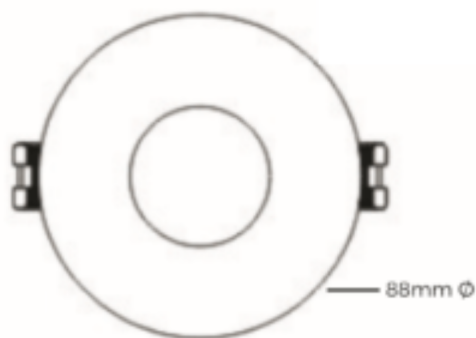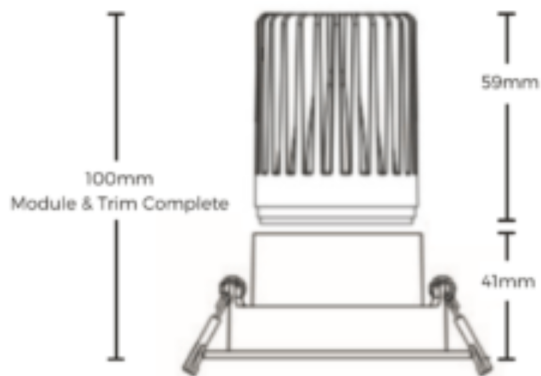

PRODUCT SPECIFICATIONS

Wattage	6W, 9W, 12W, 15W
Colour Temperature	2700K - XW, 3000K - WW, 4000K - CW
Lumen Output	6W : 600 - 710Lm 9W : 750 - 860Lm 12W : 1,030 - 1,230Lm 15W : 1,230 - 1,380Lm
Lumen Output / W	76 - 98Lm / W
CRI	>90
Beam Angle°	24°, 60°
Fixture Colour	Black, White
IP Rating	IP54
IC4 Rated	Yes
Dimmable	Yes
LED Type	CREE COB LED
SDCM	<3
UGR	<16
LM80	L70 >54,000Hrs
Power Supply	Remote Class II Flicker Free Driver
Power Factor	0.90
Voltage	200 - 240V AC
Frequency	50 - 60Hz

Working Temperature	-20°C ~+ 50°C
Cutout	75mm
Product Dimensions	6W / 9W / 12W : 100mm (H) x 88mm Ø 15W : 123mm (H) x 88mm Ø
Product Materials	Trim : Powder Coated Aluminium Module : Die-Cast Aluminium
Fitting Protection Classification	Class II
Options Available	DALI / DSI Dimming
Indent Options	38° Beam Angle 6W / 9W / 15W in 2700K
Mounting Options	Recessed
Components	Fitting Supplied As Module and Downlight Head Separately
Recommended Application	Residential & Commercial For more information please visit the Warranty & Returns page on the Rapid LED website
Warranty	5 Years (2 Years Replacement & Labour / 3 Years Replacement Only)
Standards	AS/NZS 60598.1 AS/NZS 60598.2.2 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15