

SL3242 316 STAINLESS STEEL UNDERWATER LUMINAIRE

SL3242, crafted by a distinguished LED lighting supplier, elevates underwater lighting with its IP68 submersible capabilities. Made from solid 316 stainless steel, this durable LED lighting marvel ensures longevity and brilliance under water. As your trusted LED Lighting supplier, we promise unparalleled quality and vibrancy with this LED Lighting innovation.

SPECIFICATIONS

Series Model Number:	SL3242
Input Voltage:	12VDC
Max Power Consumption:	15W
Typical Light Source Efficacy:	100lm/W
Body Diameter:	59mm Diameter
Body Length:	103mm
Cable Length:	1mtr-20mtr By request
LED Classification:	CREE COB LED
Colour/Finish:	Brushed Finish
Fixture Material:	Solid 316 Marine Grade
Beam Angle Options:	15° / 24° / 36° / 60°
LED Driver Power Factor:	Constant Voltage
IP Protection Rating:	IP68
Glass Lens:	Step Tempered Glass T=2mm.



PHOTOMETRIC INFORMATION

- | | |
|----------------|-----------------------|
| • SL3242 2700K | CCT: 2700K |
| • SL3242 3000K | CCT: 3000K |
| • SL3242 4000K | CCT: 4000K |
| • SL3242 5000K | CCT: 5000K |
| • SL3242 RGBW | CCT: RGBW (RGB+3000K) |



TYPICAL APPLICATIONS

SL3242 is a versatile lighting solution for ponds, water features, and aquatic gardens, enhancing the ambiance and safety through strategic lighting placement and design. Is also safe and suitable for general outdoor landscape lighting applications.

CONTROL & DIMMING COMPATIBILITY

SL3242 is a dimmable constant voltage luminaire. Optional constant voltage LED Driver available separately. RGBW control options include wireless control, C5304RF, DALI-2 DT8, and DMX. Contact Superlight for more information.

ORDERING INFORMATION

SL3242 2700K	IP68 Underwater/Outdoor Spotlight 2700K
SL3242 3000K	IP68 Underwater/Outdoor Spotlight 3000K
SL3242 4000K	IP68 Underwater/Outdoor Spotlight 4000K
SL3242 5000K	IP68 Underwater/Outdoor Spotlight 5000K
SL3242 RGBW	IP68 Underwater/Outdoor Spotlight RGBW (RGB+3000K)

CUSTOMISATION OPTIONS

- Available in three additional model sizes
- Beam angle can be specified 15° / 24° / 36° / 60°
- Factory fitted rubberised cable fitted / custom cable length by special request
- Luminaire can be powdercoated
- **Some custom options may be subject to minimum quantities**




Specification noted are typical values and may vary depending on exact configuration ordered. All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details and specifications at the time of ordering.




DIMENSIONS & CONFIGURATIONS

SL3242 Maximum 15W
103mm

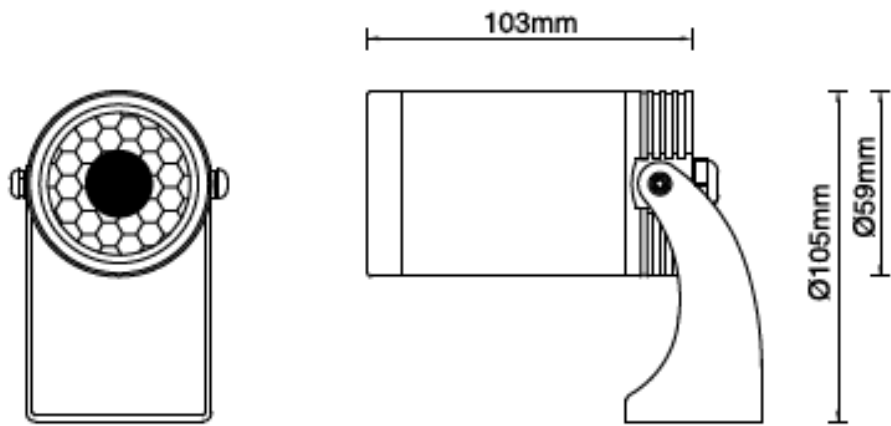

SL3242 Maximum 8W
90mm

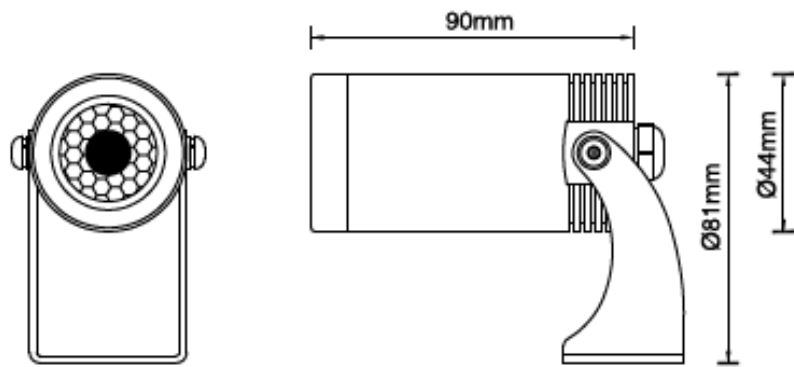

SL3242 Maximum 3W
52mm

