

1373

RULLO



SPECIFICATIONS:

| | | | | | | | | | |
|--------|----------------------|---------------|----------|-----------|------|------|----|--------------------|-------------------|
| 0.3 kg | CRI 82+ 3K and 4K | CRI 70+ 5K | Rot °180 | Tilt 150° | SELV | IP65 | CE | 5 Year warranty | Made in Australia |
|--------|----------------------|---------------|----------|-----------|------|------|----|--------------------|-------------------|

CONSTRUCTION & DESIGN

- Outdoor LED adjustable floodlight
- Constructed in machined aluminium alloy and finished in durable anodised coating
- Clear tempered glass lens
- Stainless steel exposed fasteners
- Integral constant current controller immune to voltage drop

OPTICAL & THERMAL PERFORMANCE

- Optics and integral heatsink provides premium optical and thermal performance
- Efficient optical control available various beam angles with no harsh cut off and ultra low glare

ELECTRICAL SYSTEM

- Input voltage 24V DC:** Connects to remote 24V DC power supply (TO BE ORDERED SEPARATELY)
- Supplied with 2m input cable
- Parallel connection

TECHNICAL PERFORMANCE




- 8W or 12W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Available in 3K, 4K or 5K colour temperature with low colour shift over time
- CRI 90+ is available upon request


CODE ORDERING GUIDE:

PRODUCT CODE

COLOUR CODE

Example: 1373-SP-3K-8W-24V-08

| SYSTEM POWER | COLOUR TEMP. |  24° SP |  36° FL |  44° WFL | HOT LED LUMENS | LUMINAIRE LUMEN OUTPUT | | |
|--------------|--------------|--|--|---|----------------|------------------------|------|------|
| | | PRODUCT CODE | | | | SP | FL | WFL |
| 8W | 3K | 1373-SP-3K-8W-24V | 1373-FL-3K-8W-24V | 1373-WFL-3K-8W-24V | 914 | 693 | 702 | 720 |
| | 4K | 1373-SP-4K-8W-24V | 1373-FL-4K-8W-24V | 1373-WFL-4K-8W-24V | 947 | 727 | 738 | 756 |
| | 5K | 1373-SP-5K-8W-24V | 1373-FL-5K-8W-24V | 1373-WFL-5K-8W-24V | 851 | 714 | 724 | 742 |
| 12W | 3K | 1373-SP-3K-12W-24V | 1373-FL-3K-12W-24V | 1373-WFL-3K-12W-24V | 1270 | 944 | 957 | 980 |
| | 4K | 1373-SP-4K-12W-24V | 1373-FL-4K-12W-24V | 1373-WFL-4K-12W-24V | 1320 | 993 | 1007 | 1032 |
| | 5K | 1373-SP-5K-12W-24V | 1373-FL-5K-12W-24V | 1373-WFL-5K-12W-24V | 1197 | 973 | 987 | 1011 |



| DIM CODE | OPTIONS | 8W | 12W |
|----------|---------------------------|-----|-----|
| /DALI | Dali Dimming / Switch Dim | ✓ | ✓ |
| /DSI | Digital Dimming | ✓ | ✓ |
| /AD | Analogue Dimming 1-10V | ✓ | ✓ |
| | Non-dimmable | Std | Std |


COLOUR CODE

| | |
|-----|-----------------|
| -08 | Anodised Black |
| -13 | Anodised Silver |


ACCESSORIES: Add colour suffix after the code

| | | |
|------------------|---|------------|
| 373 -08 / -13 | Ground spike constructed in aluminium alloy | 330 200 |
| 374 -08 / -13 | Surface mount base constructed in aluminium alloy | Ø50 |

WIRING DIAGRAM:

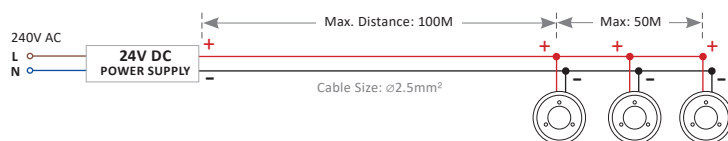

WIRING DIAGRAM FOR 1-10V DIMMING:

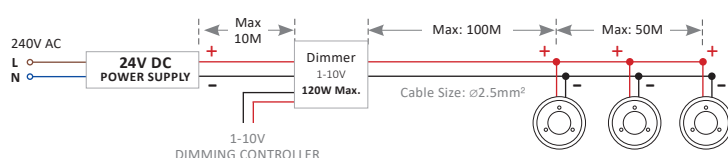

WIRING DIAGRAM FOR DALI:

