





## STRADBROKE

### ARCHITECTURAL PIN HOLE DIMMABLE LED DOWNLIGHT

#### R1077

- 6w / 9w / 12w / 15w
- 2700k / 3000k / 4000k
- White / Black Trim
- 75mm Cutout

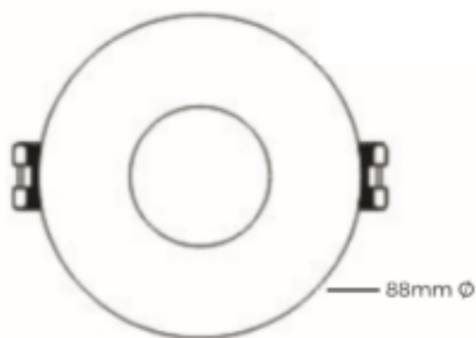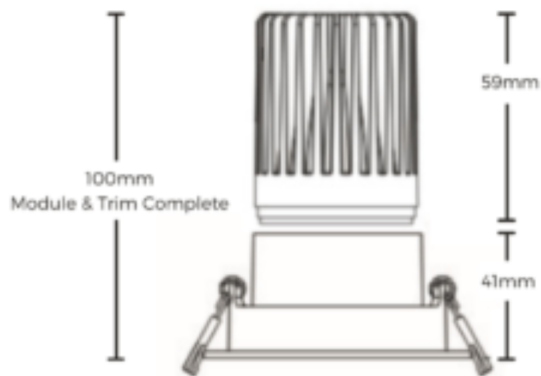

## PRODUCT SPECIFICATIONS

<b>Wattage</b>	6W, 9W, 12W, 15W
<b>Colour Temperature</b>	2700K - XW, 3000K - WW, 4000K - CW
<b>Lumen Output</b>	6W : 600 - 710Lm 9W : 750 - 860Lm 12W : 1,030 - 1,230Lm 15W : 1,230 - 1,380Lm
<b>Lumen Output / W</b>	76 - 98Lm / W
<b>CRI</b>	>90
<b>Beam Angle°</b>	24°, 60°
<b>Fixture Colour</b>	Black, White
<b>IP Rating</b>	IP54
<b>IC4 Rated</b>	Yes
<b>Dimmable</b>	Yes
<b>LED Type</b>	CREE COB LED
<b>SDCM</b>	<3
<b>UGR</b>	<16
<b>LM80</b>	L70 >54,000Hrs
<b>Power Supply</b>	Remote Class II Flicker Free Driver
<b>Power Factor</b>	0.90
<b>Voltage</b>	200 - 240V AC
<b>Frequency</b>	50 - 60Hz

<b>Working Temperature</b>	-20°C ~+ 50°C
<b>Cutout</b>	75mm
<b>Product Dimensions</b>	6W / 9W / 12W : 100mm (H) x 88mm Ø 15W : 123mm (H) x 88mm Ø
<b>Product Materials</b>	Trim : Powder Coated Aluminium Module : Die-Cast Aluminium
<b>Fitting Protection Classification</b>	Class II
<b>Options Available</b>	DALI / DSI Dimming
<b>Indent Options</b>	38° Beam Angle 6W / 9W / 15W in 2700K
<b>Mounting Options</b>	Recessed
<b>Components</b>	Fitting Supplied As Module and Downlight Head Separately
<b>Recommended Application</b>	Residential & Commercial For more information please visit the Warranty & Returns page on the Rapid LED website
<b>Warranty</b>	5 Years (2 Years Replacement & Labour / 3 Years Replacement Only)
<b>Standards</b>	AS/NZS 60598.1 AS/NZS 60598.2.2 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15